

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04R 1/02</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/52322 (43) International Publication Date: 14 October 1999 (14.10.99)</p>
<p>(21) International Application Number: PCT/GB99/01048 (22) International Filing Date: 6 April 1999 (06.04.99) (30) Priority Data: 9807316.6 7 April 1998 (07.04.98) GB (71) Applicant (for all designated States except US): NEW TRANS- DUCERS LIMITED [GB/GB]; Ixworth House, 37 Ixworth Place, London SW3 3QH (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): AZIMA, Henry [CA/GB]; 3 Southacre Close, Chaucer Road, Cambridge CB2 2TT (GB). PANZER, Joerg [DE/GB]; 19 Windermere, Stukeley Meadows, Huntingdon, Cambridgeshire PE18 6UE (GB). (74) Agent: MAGUIRE BOSS; 5 Crown Street, St. Ives, Cam- bridgeshire PE17 4EB (GB).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: ACOUSTIC DEVICE</p> <p>(57) Abstract</p> <p>From one aspect the invention is an acoustic device, e.g. a loudspeaker, comprising a resonant multi-mode acoustic radiator panel having opposed faces, a vibration exciter arranged to apply bending wave vibration to the resonant panel to produce an acoustic output, means defining a cavity enclosing at least a portion of one panel face and arranged to contain acoustic radiation from the said portion of the panel face, wherein the cavity is such as to modify the modal behaviour of the panel. From another aspect the invention is a method of modifying the modal behaviour of a resonant panel acoustic device, comprising bringing the resonant panel into close proximity with a boundary surface to define a resonant cavity therebetween.</p> <div data-bbox="860 1197 1315 1596"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

5 TITLE: ACOUSTIC DEVICE

10 DESCRIPTION

15 TECHNICAL FIELD

 The invention relates to acoustic devices and more particularly, but not exclusively, to loudspeakers incorporating resonant multi-mode panel acoustic radiators, e.g. of the kind described in our International application
20 WO97/09842. Loudspeakers as described in WO97/09842 have become known as distributed mode (DM) loudspeakers.

 Distributed mode loudspeakers (DML) are generally associated with thin, light and flat panels that radiate acoustic energy equally from both sides and in a complex
25 diffuse fashion. While this is a useful attribute of a DML there are various real-world situations in which by virtue of the applications and their boundary requirements a monopolar form of a DML would be preferred.

In such applications the product may with advantage be light, thin and unobtrusive.

BACKGROUND ART

It is known from International patent application WO97/09842 to mount a multi-mode resonant acoustic radiator in a relatively shallow sealed box whereby acoustic radiation from one face of the radiator is contained. In this connection it should be noted that the term 'shallow' in this context is relative to the typical proportions of a pistonic cone type loudspeaker drive unit in a volume efficient enclosure. A typical volume to pistonic diaphragm area ratio may be 80:1, expressed in ml to cm². A shallow enclosure for a resonant panel loudspeaker where pistonic drive of a lumped air volume is of little relevance, may have a ratio of 20:1.

DISCLOSURE OF INVENTION

According to the invention an acoustic device comprises a resonant multi-mode acoustic resonator or radiator panel having opposed faces, means defining a cavity enclosing at least a portion of one panel face and arranged to contain acoustic radiation from the said portion of the panel face, wherein the cavity is such as to modify the modal behaviour of the panel. The cavity may be sealed. A vibration exciter may be arranged to apply bending wave vibration to the resonant panel to produce an acoustic output, so that the device functions as a loudspeaker.

The cavity size may be such as to modify the modal

behaviour of the panel.

The cavity may be shallow. The cavity may be sufficiently shallow that the distance between the internal cavity face adjacent to the said one panel face and the one panel face is sufficiently small as to cause fluid coupling to the panel. The resonant modes in the cavity can comprise cross modes parallel to the panel, i.e. which modulate along the panel, and perpendicular modes at right angles to the panel. Preferably the cavity is sufficiently shallow that the cross modes (X,Y) are more significant in modifying the modal behaviour of the panel than the perpendicular modes (Z). In embodiments, the frequencies of the perpendicular modes can lie outside the frequency range of interest.

15 The ratio of the cavity volume to panel area ($\text{ml}:\text{cm}^2$) may be less than 10:1, say in the range about 10:1 to 0.2:1.

The panel may be terminated at its edges by a generally conventional resilient surround. The surround may resemble the roll surround of a conventional piston drive unit and may comprise one or more corrugations. The resilient surround may comprise foam rubber strips.

Alternatively the edges of the panel may be clamped in the enclosure, e.g. as described in our co-pending PCT patent application PCT/GB99/00848 dated 30 March 1999.

25 Such an enclosure may be considered as a shallow tray containing a fluid whose surface may be considered to have wave-like behaviour and whose specific properties depend on both the fluid (air) and the dimensional or volume box

geometry. The panel is placed in coupled contact with this active wave surface and the surface wave excitation of the panel excites the fluid. Conversely the natural wave properties of the fluid interact with the panel, so modifying its behaviour. This is a complex coupled
5 system with new acoustic properties in the field.

Subtle variations in the modal behaviour of the panel may be achieved by providing baffling, e.g. a simple baffle, in the enclosure and/or by providing frequency selective absorption in the enclosure.

From another aspect the invention is a method of modifying the
10 modal behaviour of a resonant panel loudspeaker or resonator, comprising bringing the resonant panel into close proximity with a boundary surface to define a resonant cavity therebetween.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1 is a cross section of a first embodiment of sealed box
15 resonant panel loudspeaker;

Figure 2 is a cross-sectional detail, to an enlarged scale, of the embodiment of Figure 1;

Figure 3 is a cross section of a second embodiment of sealed box resonant panel loudspeaker;

20 Figure 4 shows the polar response of a DML free-radiating on both sides;

Figure 5 shows a comparison between the sound pressure level in Free Space (solid line) and with the DML arranged 35mm from the wall (dotted line);

25 Figure 6 shows a comparison between the acoustic power of a DML in free space (dotted line) and with a baffle around the panel between the front and rear;

Figure 7 shows a loudspeaker according to the invention;

Figure 8 shows a DML panel system;

Figure 9 illustrates the coupling of components;

Figure 10 illustrates a single plate eigen-function;

Figure 11 shows the magnitudes of the frequency
5 response of the first ten in-vacuum panel modes;

Figure 12 shows the magnitudes of the frequency
response of the same modes in a loudspeaker according to
the embodiment of the invention;

Figure 13 shows the effect of the enclosure on the
10 panel velocity spectrum;

Figure 14 illustrates two mode shapes;

Figure 15 shows the frequency response of the
reactance;

Figure 16 illustrates panel velocity measurement;

15 Figure 17 illustrates the microphone set up for the
measurements;

Figure 18 shows the mechanical impedance for various
panels;

Figure 19 shows the power response of various panels;

20 Figure 20 shows the polar response of various panels;

Figure 21 shows a microphone set up for measuring the
internal pressure in the enclosure;

Figure 22 shows the internal pressure contour;

Figure 23 shows the internal pressure measured using
25 the array of Figure 21;

Figure 24 shows the velocity and displacement of
various panels;

Figure 25 shows the velocity spectrum of an A5 panel

in free space and enclosed;

Figure 26 shows the velocity spectrum of another A5 panel in free space and enclosed;

Figure 27 shows the power response of an A2 panel in 5 an enclosure of two depths, and

Figure 28 illustrates equalisation using filters.

In the drawings and referring more particularly to Figures 1 and 2, a sealed box loudspeaker 1 comprises a box-like enclosure 2 closed at its front by a resonant 10 panel-form acoustic radiator 5 of the kind described in WO97/09842 to define a cavity 13. The radiator 5 is energised by a vibration exciter 4 and is sealed to the enclosure round its periphery by a resilient suspension 6. The suspension 6 comprises opposed resilient strips 7, e.g. 15 of foam rubber mounted in respective L-section frame members 9,10 which are held together by fasteners 11 to form a frame 8. The interior face 14 of the back wall 3 of the enclosure 2 is formed with stiffening ribs 12 to minimise vibration of the back wall. The enclosure may be a 20 plastics moulding or a casting incorporating the stiffening ribs.

The panel in this embodiment may be of A2 size and the depth of the cavity 13 may be 90mm.

The loudspeaker embodiment of Figure 3 is generally 25 similar to that of Figures 1 and 2, but here the radiator panel 5 is mounted on a single resilient strip suspension 6, e.g. of foam rubber, interposed between the edge of the radiator 5 and the enclosure to seal the cavity. The

radiator panel size may be A5 and the cavity depth around 3 or 4 mm.

It will be appreciated that although the embodiments of Figures 1 to 3 relate to loudspeakers, it would equally be possible to produce an acoustic resonator for modifying the acoustic behaviour of a space, e.g. a meeting room or auditorium, using devices of the general kind of Figures 1 to 3, but which omit the vibration exciter 4.

It is shown that a panel in this form of deployment can provide a very useful bandwidth with quite a small enclosure volume with respect to the diaphragm size, as compared with piston speakers. The mechanisms responsible for the minimal interaction of this boundary with the distributed mode action are examined and it is further shown that in general a simple passive equalisation network may be all that is required to produce a flat power response. It is also demonstrated that in such a manifestation, a DML can produce a near-ideal hemispherical directivity pattern over its working frequency range into a $20\ 2\pi$ space.

A closed form solution is presented which is the result of solving the bending wave equations for the coupled system of the panel and enclosure combination. The system acoustic impedance function is derived and is in turn used to calculate the effect of the coupled enclosure on the eigen-frequencies, and predicting the relevant shifts and additions to the plate modes.

Finally, experimental measurement data of a number

samples of varying lump parameters and sizes are investigated and the measurements compared with the results from the analytical model.

Figure 4 illustrates a typical polar response of a free DML. Note that the reduction of pressure in the plane of the panel is due to the cancellation effect of acoustic radiation at or near the edges. When a free DML is brought near a boundary, in particular parallel with the boundary surface, acoustic interference starts to take place as the distance to the surface is reduced below about 15cm, for a panel of approximately 500 cm² surface area. The effect varies in its severity and nature with the distance to the boundary as well as the panel size. The result, nonetheless is invariably a reduction of low frequency extension, peaking of response in the lower midrange region, and some aberration in the midrange and lower treble registers as shown in the example of Figure 5. Because of this, and despite the fact that the peak can easily be compensated for, application of a 'free' DML near a boundary becomes rather restrictive.

When a DML is placed in a closed box or so-called "infinite baffle" of sufficiently large volume, radiation due to the rear of the panel is contained and that of the front is generally augmented in its mid and low frequency response, benefiting from two aspects. First is due to the absence of interference effect, caused by the front and rear radiation, at frequencies whose acoustic wavelengths in air are comparable to the free panel dimensions; and

second, from the mid to low frequency boundary reinforcement due to baffling and radiation into 2π space, see Figure 6. Here we can see that almost 20 dB augmentation at 100Hz is achieved from a panel of 0.25 m^2 surface area.

Whilst this is a definite advantage in maximising bandwidth, it may not be possible to incorporate in practice unless the application would lend itself to such a solution. Suitable applications include ceiling tile
10 loudspeakers and custom in-wall installation.

In various other applications there may be a definite advantage to utilise the benefits of the "infinite baffle" configuration, without having the luxury of a large closed volume of air behind the panel. Such applications may also
15 benefit from an overall thinness and lightness of the loudspeaker. It is an object of the present invention to bring understanding to this form of deployment and offer analytical solutions.

A substantial volume of work supports conventional
20 piston loudspeakers in various modes of operation, especially in predicting their low frequency behaviour when used in an enclosure. It is noteworthy that distributed mode loudspeakers are of very recent development and as such there is virtually no prior knowledge of the issues
25 involved to assist with the derivation of solutions for similar analysis. In what follows, an approach is adopted which provides a useful set of solutions for a DML deployed in various mechanoacoustic interface conditions including

loading with a small enclosure.

The system under analysis is shown schematically in Figure 7. In this example the front side of the panel radiates into free space, whilst the other side is loaded with an enclosure. This coupled system may be treated as a network of velocities and pressures are shown in the block diagram of Figure 8. The components are, from left to right; the electromechanical driving section, the modal system of the panel, and the acoustical systems.

10 The normal velocity of the bending-wave field across a vibrating panel is responsible for its acoustic radiation. This radiation in turn leads to a reacting force which modifies the panel vibration. In the case of a DML radiating equally from both sides, the radiation impedance, 15 which is the reacting element, is normally insignificant as compared with the mechanical impedance of the panel. However, when the panel radiates into a small enclosure, the effect of acoustic impedance due to its rear radiation is no longer small, and in fact it will modify and add to 20 the scale of the modality of the panel.

This coupling, as shown in Figure 9, is equivalent to a mechanoacoustical closed loop system in which the reacting sound pressure is due to the velocity of the panel itself. This pressure modifies the modal distribution of 25 the bending wave field which in turn has an effect on the sound pressure response and directivity of the panel.

In order to calculate directivity and to inspect forces and flows within the system, it is necessary to

solve for the plate velocity. This far-field sound pressure response can then be obtained with the help of Fourier transformation of this velocity as described in an article by PANZER, J; HARRIS, N; entitled "Distributed Mode
5 Loudspeaker Radiation Simulation" presented at the 105th AES Convention, San Francisco 1998 # 4783. The forces and flows can then be found with the help of network analysis.

This problem can be approached by developing the velocities and pressures of the total system in terms of
10 the in-vacuum panel eigen-functions (3,4) as explained in CREMER, L; HECKL, M; UNGAR, E; "Structure-Borne Sound" SPRINGER 1973 and BLEVINS, R.D. "Formulas for Natural frequency and Mode Shape", KRIEGER Publ., Malabar 1984.

For example, the velocity at any point on the panel can be
15 calculated from equation (1).

$$v_{(x,y)} = \sum_{i=0}^{\infty} Y_{pi}(j\omega) \cdot F_{oi}(j\omega) \cdot \phi_{pi}(x_0, y_0) \cdot \phi_{pi}(x, y) \quad (1)$$

This series represents a solution to the differential
20 equation describing the plate bending waves, equation (2), when coupled to the electromechanical lumped element network as well as its immediate acoustic boundaries.

$$L_B \{ v_{(x,y)} \} - \mu \cdot \omega^2 \cdot v_{(x,y)} = j\dot{\omega} \cdot p_m(x, y) - j\omega \cdot p_a(x, y) \quad (2)$$

25 L_B is the bending rigidity differential operator of fourth order in x and y, v is the normal component of the bending wave velocity. μ is the mass per unit area and ω

is the driving frequency. The panel is disturbed by the mechanical driving pressure, p_m , and the acoustic reacting sound pressure field, p_a , Figure 7.

Each term of the series in equation (1) is called a modal velocity; or, a "mode" in short. The modal decomposition is a generalised Fourier transform whose eigen-functions ϕ_{pi} share the orthogonality property with the sine and cosine functions associated with Fourier transformation. The orthogonality property of ϕ_{pi} is a necessary condition to allow appropriate solutions to the differential equation (2). The set of eigen-functions and their parameters are found from the homogenous version of equation (2) i.e. after switching off the driving forces. In this case the panel can only vibrate at its natural frequencies or the so-called eigen-frequencies, ω_i , in order to satisfy the boundary conditions.

In equation (2), $\phi_{pi}(x,y)$ is the value of the i^{th} plate eigen-function at the position where the velocity is observed. $\phi_{pi}(x_0,y_0)$ is the eigen-function at the position where the driving force $F_{pi}(\omega)$ is applied to the panel. The driving force includes the transfer functions of the electromechanical components associated with the driving actuator at (x_0,y_0) , as for example exciters, suspensions, etc. Since the driving force depends on the panel velocity at the driving point, a similar feedback situation as with the mechanoacoustical coupling exists at the drive point(s), albeit the effect is quite small in practice.

Figure 10 gives an example of the velocity magnitude distribution of a single eigen-function across a DML panel. The black lines are the nodal lines where the velocity is zero. With increasing mode index the velocity pattern becomes increasingly more complex. For a medium sized panel approximately 200 modes must be summed in order to cover the audio range.

The modal admittance, $Y_{pi}(j\omega)$, is the weighting function of the modes and determines with which amplitude and in 10 which phase the i^{th} mode takes part in the sum of equation (1). Y_{pi} , as described in equation (3), depends on the driving frequency, the plate eigen-value and, most important in the context of this paper, on the acoustic impedance of the enclosure together with the impedance due 15 to the free field radiation.

$$Y_{pi}(s) = \frac{1}{R_{pi}} \cdot \frac{s_p \cdot d_{pi}}{s_p^2 + s_p \cdot d_{pi} + \gamma_{pi}^2} \quad (3)$$

$s_p = s/\omega_p$ is the Laplace frequency variable normalised to 20 the fundamental panel frequency, ω_p , which in turn depends on the bending stiffness K_p and mass M_p of the panel, namely $\omega_p^2 = K_p/M_p$. R_{pi} is the modal resistance due to material losses and describes the value of $Y_{pi}(j\omega)$ at resonance when $s_p = \lambda_{pi}$. λ_{pi} is a scaling factor and is a function of the i^{th} 25 plate eigen-value λ_{pi} and the total radiation impedance Z_{mai} as described in equation (4).

$$Y_{pi}(s) = \sqrt{\lambda_{pi}^4 + s_p \cdot Z_{mai}(j\omega)} \cdot \sqrt{\frac{1}{K_p \cdot M_p}} \quad (4)$$

In the vacuum case ($Z_{mai}=0$) the second term in equation (3) becomes a band-pass transfer function of second order with damping factor d_{pi} . Figure 11 shows the magnitudes of the frequency response of the in-vacuum $Y_{pi}(j\omega)$ for the first ten modes of a panel, when clamped at the edges. The panel eigen-frequencies coincide with the peaks of these curves.

10 If the same panel is now mounted onto an enclosure, the modes will not only be shifted in frequency but also modified, as seen in Figure 12. This happens as a result of the interaction between the two modal systems of the panel and the enclosure, where the modal admittance of the

15 total system is no longer a second order function as in the in-vacuum case. In fact, the denominator of equation (3) could be expanded in a polynomial of high order, which will reflect the resulting extended characteristic function.

The frequency response graphs of Figure 13 shows the effect of the enclosure on the panel velocity spectrum.

20 The two frequency response curves are calculated under identical drive condition, however, the left-hand graph displays the in-vacuum case, whilst the right hand graph shows the velocity when both sides of the panel are loaded with an enclosure. A double enclosure was used in this

25 example in order to exclude the radiation impedance of air. The observation point is at the drive point of the exciter.

Clearly visible is the effect of the panel eigen-frequency shift to higher frequencies in the right diagram, which was also seen in Figure 12. It is noteworthy that as a result of the enclosure influence, and the subsequent increase in the number and density of modes, a more evenly distributed curve describing the velocity spectrum is obtained.

The mechanical radiation impedance is the ratio of the reacting force, due to radiation, and the panel velocity. For a single mode, the radiation impedance can be regarded as constant across the panel area and may be expressed in terms of the acoustical radiated power P_{ai} of a single mode.

Thus the modal radiation impedance of the i^{th} mode may be described by equation (5).

$$Z_{mai} = 2 \cdot \frac{P_{ai}}{\langle v_i \rangle^2} \quad (5)$$

$\langle v_i \rangle$ is the mean velocity across the panel associated with the i^{th} mode. Since this value is squared and therefore always positive and real, the properties of the radiation impedance Z_{mai} are directly related to the properties of the acoustical power, which is in general a complex value. The real part of P_{ai} is equal to the radiated far-field power, which contributes to the resistive part of Z_{mai} , causing damping of the velocity field of the panel. The imaginary part of P_{ai} is caused by energy storing mechanisms of the coupled system, yielding to a positive or negative value for the reactance of Z_{mai} .

A positive reactance is caused by the presence of an

acoustical mass. This is typical, for example, of radiation into free space. A negative reactance of Z_{mai} , on the other hand, is indicative of the presence of a sealed enclosure with its equivalent stiffness. In physical terms, a 'mass' type radiation impedance is caused by a movement of air without compression, whereas a 'spring' type impedance exists when air is compressed without shifting it.

The principal effect of the imaginary part of the radiation impedance is a shift of the in-vacuum eigen-frequencies of the panel. A positive reactance of Z_{mai} (mass) causes a down-shift of the plate eigen-frequencies, whereas a negative reactance (stiffness) shifts the eigen-frequencies up. At a given frequency, the pane-mode itself dictates which effect will be dominating. This phenomenon is clarified by the diagram of Figure 14, which shows that symmetrical mode shapes cause compression of air, 'spring' behaviour, whereas asymmetrical mode shapes shift the air side to side, yielding an acoustical 'mass' behaviour. New modes, which are not present in either system when they are apart, are created by the interaction of the panel and enclosure reactances.

Figure 15 shows the frequency response of the imaginary part of the enclosure radiation impedance. The left-hand graph displays a 'spring-type' reactance, typically produced by a symmetrical panel-mode. Up to the first enclosure eigen-frequency the reactance is mostly negative. In-vacuum eigen-frequencies of the panel, which

are within this frequency region, are shifted up. In contrast the right diagram displays a 'mass-type' reactance behaviour, typically produced by an asymmetrical panel mode.

- 5 If the enclosure is sealed and has a rigid wall parallel to the panel surface, as in our case here, then the mechanical radiation impedance for the i^{th} -plate mode is (5):

$$10 \quad Z_{\text{mai}} = -j \cdot \omega \cdot \rho_a \cdot \frac{A_0^2}{A_d} \cdot \sum_{k,l} \frac{\Psi_{(i,k,l)}^2}{k_{z(k,l)} \cdot \tan(k_{z(k,l)} \cdot L_{dz})} \quad (6)$$

$\Psi_{(i,k,l)}$ is the coupling integral which takes into account the cross-sectional boundary conditions and involves the plate and enclosure eigen-functions. The index, i , in equation (6) is the plate mode-number; L_{dz} is the depth of the enclosure; and k_z is the modal wave-number component in the z -direction (normal to the panel). For a rigid rectangular enclosure k_z is described by equation(7):

$$20 \quad k_{z(k,l)} = \sqrt{k_a^2 - \left[\left(\frac{k \cdot \pi}{L_{dx}} \right)^2 + \left(\frac{l \cdot \pi}{L_{dy}} \right)^2 \right]} \quad (7)$$

The indices, k and l , are the enclosure cross-mode numbers in x and y direction, where L_{dx} and L_{dy} are enclosure dimensions in this plane. A_0 is the area of the panel and A_d is cross-sectional area of the enclosure in the x and y plane.

Equation (6) is a complicated function, which describes the interaction of the panel modes and the enclosure modes in detail. In order to understand the nature of this formula, let us simplify it by constraining the system to the first mode of the panel and to the z-modes of the enclosure only ($k=l=0$). This will result in the following simplified relationship.

$$Z_{ma0} = -j \cdot Z_a \cdot \frac{A_0^2}{A_d} \cdot \cot(k_z \cdot L_{dz})$$

10 (8)

Equation (8) is the well known driving point impedance of a closed duct (6). If the product $k_z \cdot L_{dz} \ll 1$ then a further simplification can be made as follows.

$$Z_{ma0} = A_0^2 \cdot \frac{1}{j \cdot \omega \cdot C_{ab}}$$

15 (9)

where $C_{ab} = V_b / (\rho_a \cdot c_a^2)$ is the acoustical compliance of the enclosure of volume V_b . Equation (9) is the low frequency lumped element model of the enclosure. If the source is a rigid piston of mass M_{ms} with a suspension having a compliance C_{ms} then the fundamental 'mode' has the eigenvalue $\lambda_{po} = 1$ and the scaling factor of the coupled system of equation (4) becomes the well known relationship as shown in equation (10), [1].

25

$$\gamma_{po} = \sqrt{1 + \frac{C_{ms}}{C_{mb}}}$$

(10)

with the equivalent mechanical compliance of the enclosure air volume $C_{mb} = C_{ab}/A_0^2$.

Various tests were carried out to investigate the effect of a shallow back enclosure on DM loudspeakers. In addition to bringing general insight into the behaviour of DNM panels in an enclosure, the experiments were designed to help verify the theoretical model and establish the extent to which such models are accurate in predicting the behaviour of the coupled modal system of a DML panel and its enclosure.

Two DML panels of different size and bulk properties were selected as our test objects. It was decided that these would be of sufficiently different size on the one hand, and of a useful difference in their bulk properties on the other, to cover a good range in scale. The first set 'A' was selected as a small A5 size panel of 149mm x 210mm with three different bulk mechanical properties. These were A5-1, polycarbonate skin on polycarbonate honeycomb; A5-2 carbon fibre on Rohacell; and A5-3, Rohacell without skin. Set 'B' was chosen to be eight times larger, approximately to A2 size of 420mm x 592mm. A2-1 was constructed with glass fibre skin on polycarbonate honeycomb core, whilst A2-2 was carbon fibre skin on aluminium honeycomb. Table 1 lists the bulk properties of these objects. Actuation was achieved by a single electrodynamic moving coil exciter at the optimum position. Two exciter types were used, where they suited most the

size of the panels under test. In the case of A2 panels a 25mm exciter was employed with $B_l = 2.3 \text{ Tm}$, $R_e = 3.7 \Omega$ and $L_e = 60 \mu\text{H}$, whilst a 13mm model was used in the case of the smaller A5 panels with $B_l = 1.0 \text{ Tm}$, $R_e = 7.3 \Omega$ and $L_e = 36 \mu\text{H}$.

Panel	Type	B (Nm)	μ (Kg/m ²)	Zm (Ns/m)	Size (mm)
A2-1	Glass on PC Core	10.4	0.89	24.3	5 x 592 x 420
A2-2	Carbon on AI Core	57.6	1.00	60.0	7.2 x 592 x 420
A5-1	PC on PC core	1.39	0.64	7.5	2 x 210 x 149
A5-2	Carbon on Rohacell	3.33	0.65	11.8	2 x 210 x 149
A5-3	Rohacell core	0.33	0.32	2.7	3 x 210 x 149

5

Panels were mounted onto a back enclosure with adjustable depth using a soft polyurethane foam for suspension and acoustic seal. The enclosure depth was made adjustable on 16, 28, 40 and 53mm for set 'A' and on 20, 50, 95
10 and 130mm for set 'B' panels. Various measurements were carried out at different enclosure depths for every test case and result documented.

Panel velocity and displacement were measured using a Laser Vibrometer. The frequency range of interest was
15 covered with a linear frequency scale of 1600 points. The set-up shown in Figure 16 was used to measure the panel mechanical impedance by calculating the ratio of the applied force to the panel velocity at the drive point.

20

$$Z_m = \frac{F}{V}$$

In this procedure, the applied force was calculated

from the lump parameter information of the exciter. Although panel velocity in itself feeds back into the electromechanical circuit, its coupling is quite weak. It can be shown that for small values of exciter B_l , (1-3 T_m),
5 providing that the driving amplifier output impedance is low (constant voltage), the modal coupling back to the electromechanical system is sufficiently weak to make this assumption plausible. Small error arising from this approximation was therefore ignored. Figures 18a to f show
10 the mechanical impedance of the A5-1 and A5-2 panels, derived from the measurement of panel velocity and the applied force measured by the Laser Vibrometer. Note that the impedance minima for each enclosure depth occur at the system resonance mode.

15 Sound pressure level and polar response of the various panels were measured in a large space of 350 cubic metres and gated at 12 to 14ms for anechoic response using MLSSA, depending on the measurement. Power measurements were carried out employing a 9-microphone array system, as shown
20 in Figure 17d and in a set-up shown in Figure 17a. These are plotted in Figures 19a to f for various enclosure depths. System resonance is highlighted by markers on the graphs.

Polar response of the A5-1 and A5-2 panels were
25 measured for a 28mm deep enclosure and the result is shown in Figures 20a and b. When compared with the polar plot of the free DML in Figure 1, they demonstrate the significance of the closed-back DML in its improved directivity.

To investigate further the nature and the effect of enclosure on the panel behaviour, especially at the combined system resonance, a special jig was made to allow the measurement of the internal pressure of the enclosure at nine predetermined points as shown in Figure 21. The microphone was inserted in the holes provided within the back-plate of an A5 enclosure jig at a predetermined depth, while the other eight position holes were tightly blocked with hard rubber grommets. The microphone was mechanically isolated from the enclosure by an appropriate rubber grommet during the measurement.

From this data, a contour plot was created to show the pressure distribution at system resonance and that either side of this frequency as shown in Figures 22a to c. The pressure frequency response was also plotted for the nine positions as shown in Figure 27. This graph exhibits good definition in the region of resonance for all curves associated with the measurement points within the enclosure. However, the pressure tends to vary across the enclosure cross-sectional area as the frequency is increased.

The normal component of velocity and displacement across the panels was measured with a Scanning Laser Vibrometer. The velocity and displacement distribution across the panels were plotted to investigate the behaviour of the panel around the coupled system resonance. The results were documented and a number of the cases are shown in Figures 24a to d. These results suggest a timpanic

modal behaviour of the panel at resonance, with the whole of the panel moving, albeit at a lesser velocity and displacement as one moves towards the panel edges.

In practice this behaviour is consistent for all
5 boundary conditions of the panel, although the mode shape will vary from case to case depending on a complex set of parameters, including panel stiffness, mass, size and boundary conditions. In the limit and for an infinitely rigid panel, this system resonance will be seen as the
10 fundamental rigid body mode of the piston acting on the stiffness of the enclosure air volume. It was found to be convenient to call the DML system resonance, the 'Whole Body Mode' or WBM.

The full theoretical derivations of the coupled system
15 has been implemented in a suite of software by New Transducers Limited. A version of this package was used to simulate the mechanoacoustical behaviour of our test objects in this paper. This package is able to take into account all the electrical, mechanical and acoustical
20 variables associated with a panel, exciter(s) and mechanoacoustical interfaces with a frame or an enclosure and predict, amongst other parameters, the far-field acoustic pressure, power and directivity of the total system.

25 Figure 25a shows the log-velocity spectrum of a free radiating, A5-1 panel clamped in a frame, radiating in free space equally from both sides. The solid line represents the simulation curve and the dashed line is the measure

velocity spectrum. At low frequencies the panel goes in resonance with the exciter. The discrepancy in the frequency range above 1000 Hz is due to the absence of the free field radiation impedance in the simulation model.

5 Figure 25b shows the same panel as in Figure 25a but this time loaded with two identical enclosures, one on each side of the panel, with the same cross-section as the panel and a depth of 24mm. A double enclosure was designed and used in order to exclude the radiation impedance of free
10 field on one side of the panel and make the experiment independent of the free field radiation impedance. It is important to note that this laboratory set-up was used for theory verification only.

In order to enable velocity measurement of the panel,
15 the back walls of the two enclosures were made from a transparent material to allow access by the laser beam to the panel surface. This test was repeated using panel A5-3 Rohacell without skin, with different bulk properties and the result is shown in Figures 26a and b. In both cases
20 simulation was performed using 200 point logarithmic range, whilst the laser measurement used 1600 point linear range.

From the foregoing theory and work, it is clear that a small enclosure fitted to a DML will bring with it, amongst a number of benefits, a singular drawback. This manifests
25 itself in an excess of power due to WBM at the system resonance as shown in Figures 27a and b. It is noteworthy that apart from this peak, in all other aspect the enclosed DML can offer a substantially improved performance

including increased power bandwidth.

It has been found that in most cases a simple second order band-stop equalisation network of appropriate Q matching that of the power response peak, may be designed to equalise the response peak. Furthermore in some cases a single pole high-pass filter would often adjust for this by tilting the LF region, to provide a broadly flat power response. Due to the unique nature of DML panels and their resistive electrical impedance response, whether the filter is active or passive, its design will remain very simple. Figure 28a shows where a band-stop passive filter has been incorporated for equalisation. Further examples may be seen in Figures 28b and c that show simple pole EQ with a capacitor used in series with the loudspeakers.

When a free DML is used near and parallel to a wall, special care must be taken to ensure minimal interaction with the latter, due to its unique complex dipolar characteristics. This interaction is a function of the distance to the boundary, and therefore, cannot be universally fixed. Full baffling of the panel has definite advantages in extending the low frequency response of the system, but this may not be a practical proposition in a large number of applications.

A very small enclosure used with a DML will render it independent of its immediate environment and make the system predictable in its acoustical performance. The mathematical model developed demonstrates the level of complexity for a DML in the coupled system. This throws a

sharp contrast between the prediction and design of a DML and that of the conventional piston radiator. Whilst the mechanoacoustical properties of a cone-in-box may be found by relatively simply calculations (even by a hand
5 calculator) those associated with a DML and its enclosure are subject to complex interactive relationships which render this system impossible to predict without the proper tools.

The change in system performance with varying
10 enclosure volume is quite marked in the case where the depth is small compared with the panel dimensions. However, it is also seen that beyond a certain depth the increase in LF response become marginal. This of course is consistent with behaviour of a rigid piston in an enclosure. As an
15 example, an A2 size panel with 50mm enclosure depth can be designed to have a bandwidth extending down to about 120Hz, Figure 24.

Another feature of a DML with a small enclosure is seen to be a significant improvement in the mid and high
20 frequency response of the system. This is in many of the measured and simulated graphs in this paper and of course anticipated by the theory. It is clear that the increase in the panel system modality is mostly responsible for this improvement, however, enclosures losses might also
25 influence this by increasing the overall damping of the system.

As a natural consequence of containing the rear radiation of the panel, the directivity of the enclosed

system changes substantially from a dipolar shape to a near cardioid behaviour as shown in Figure 17. It is envisaged that the directivity associated with a closed-back DML may find use in certain applications where stronger lateral 5 coverage is desirable.

Power response measurements were found to be most useful when working with the enclosed DM system, in order to observe the excessive energy region that may need compensation. This is in line with other work done on DM 10 loudspeakers, in which it has been found that the power response is the most representative acoustic measurement correlating well to the subjective performance of a DML. Using the power response, it was found that in practice a simple band-pass or a single pole high-pass filter is all 15 that is needed to equalise the power response in this region.

CLAIMS

1. An acoustic device comprising a resonant multi-mode acoustic panel having opposed faces, means defining a cavity enclosing at least a portion of one panel face and
5 arranged to contain acoustic radiation from the said portion of the panel face, wherein the cavity is such as to modify the modal behaviour of the panel.
2. An acoustic device according to claim 1, wherein the cavity size is such as to modify the modal behaviour of the
10 panel.
3. An acoustic device according to claim 2, wherein the cavity is shallow.
4. An acoustic device according to claim 3, wherein the cavity is sufficiently shallow that the rear face of the
15 cavity facing the said one panel face causes fluid coupling to the panel.
5. An acoustic device according to claim 4, wherein X and Y cross modes are generally dominant.
6. An acoustic device according to any preceding claim,
20 wherein the cavity is sealed.
7. An acoustic device according to any preceding claim, wherein the ratio of the cavity volume to panel area ($\text{ml}:\text{cm}^2$) is in the range about 10:1 to 0.2:1.
8. An acoustic device according to any preceding claim,
25 wherein the panel is mounted in and sealed to the cavity defining means by a peripheral surround.
9. An acoustic device according to claim 8, wherein the surround is resilient.

10. A loudspeaker comprising an acoustic device as claimed in any preceding claim, and having a vibration exciter arranged to apply bending wave vibration to the resonant panel to produce an acoustic output.
- 5 11. A method of multiplying the modal behaviour of a resonant panel acoustic device, comprising bringing the resonant panel into close proximity with a boundary surface to define a resonant cavity therebetween.

Figure 1.

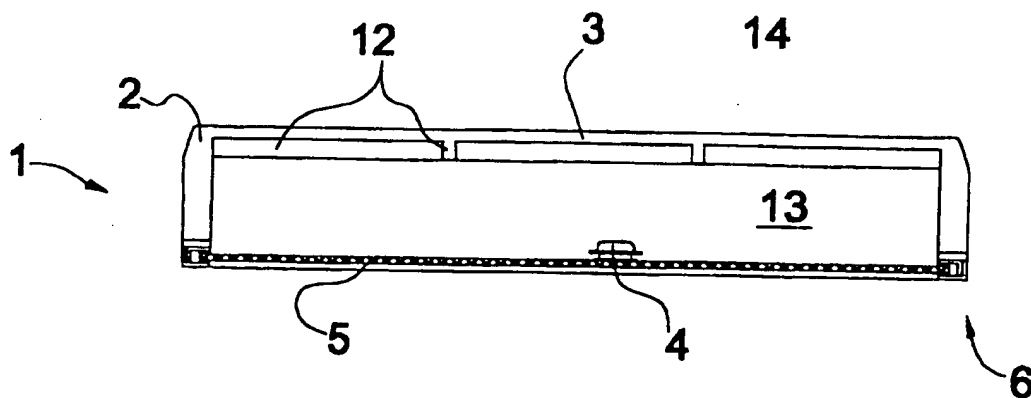


Figure 2.

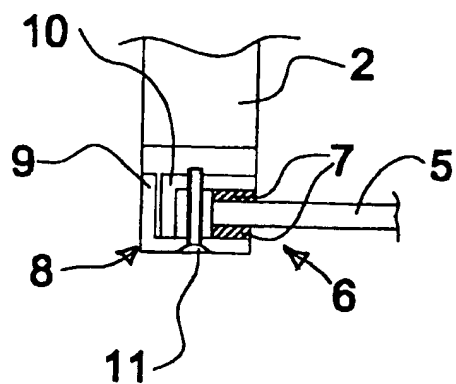
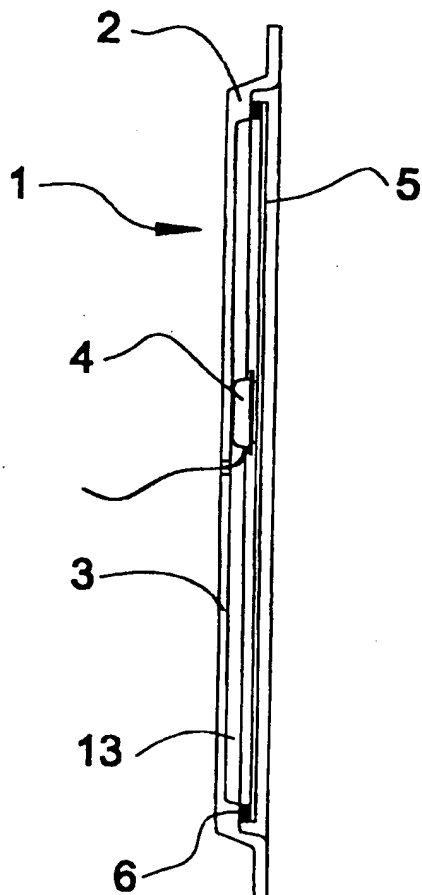


Figure 3.



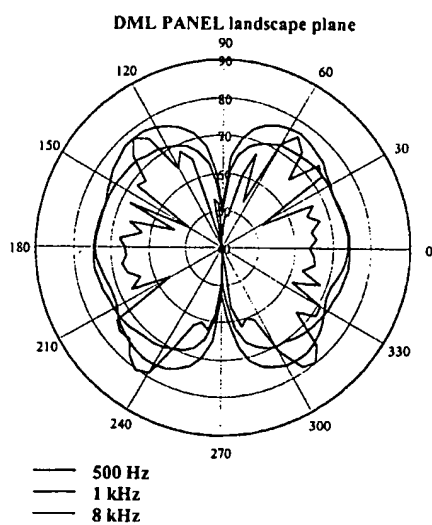


Fig. 4

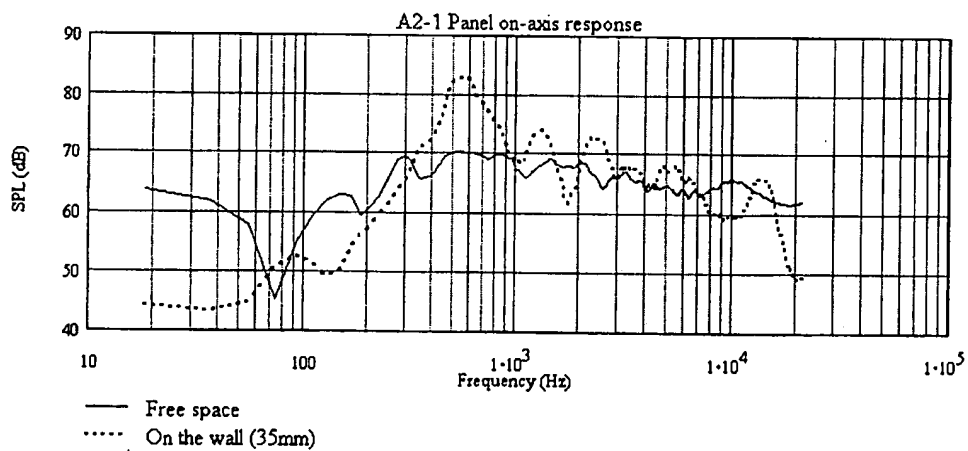


Fig. 5

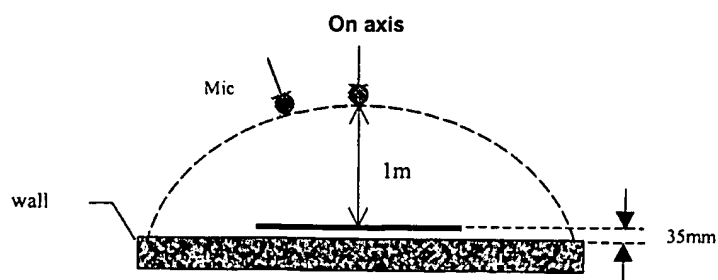


Fig. 17a

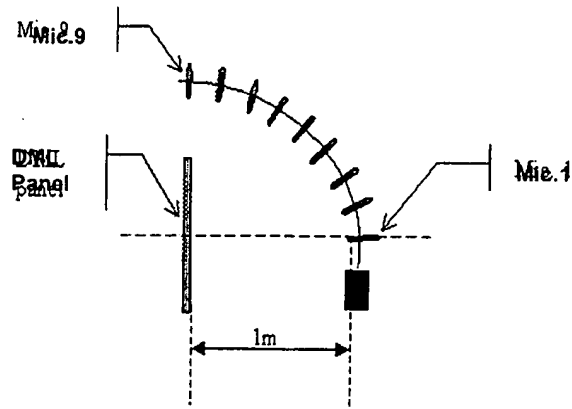


Fig. 17b

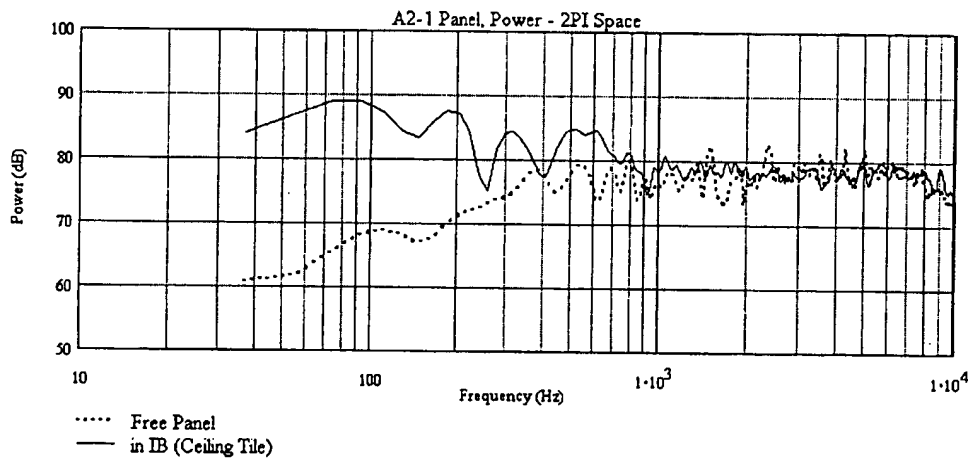


Fig. 6

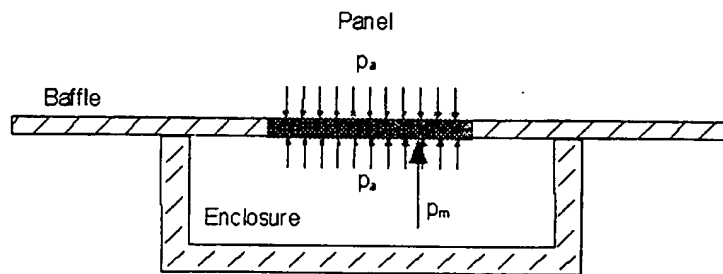


Fig. 7

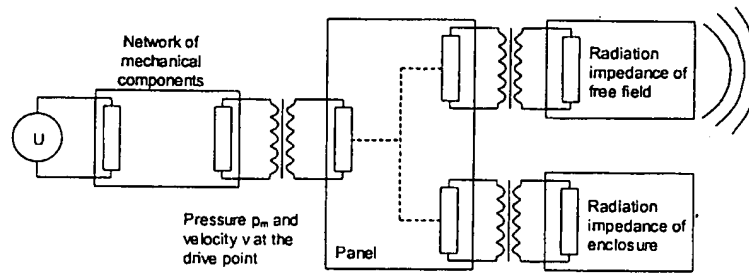


Fig. 8

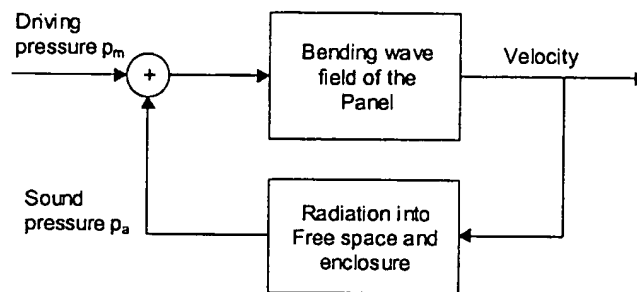


Fig. 9

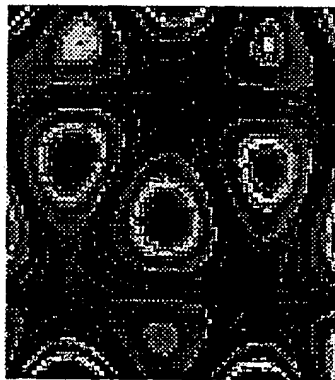


Fig. 10

5/22

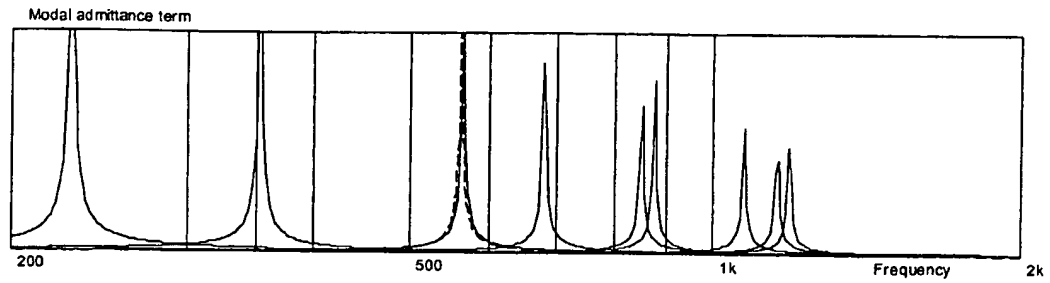


Fig. 11

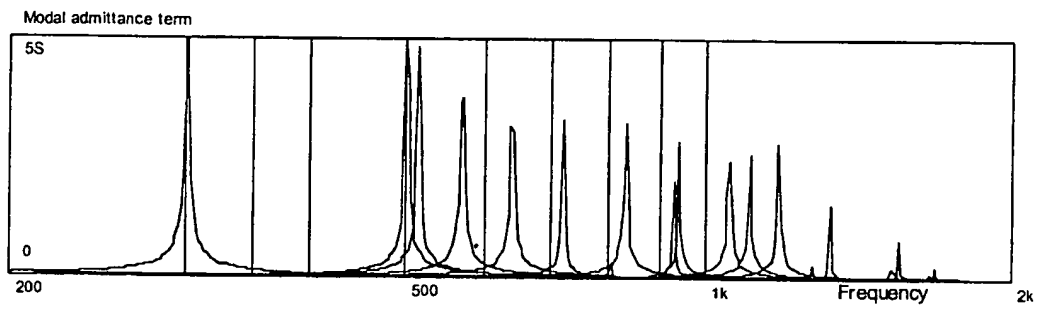


Fig. 12

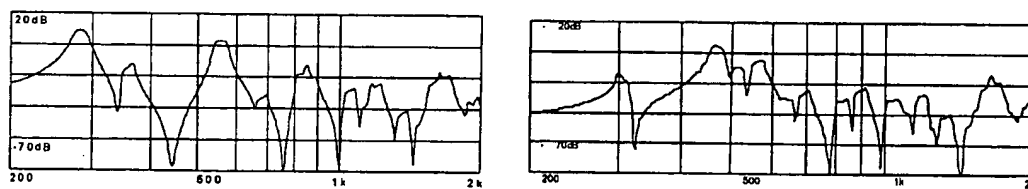


Fig. 13



Fig. 14

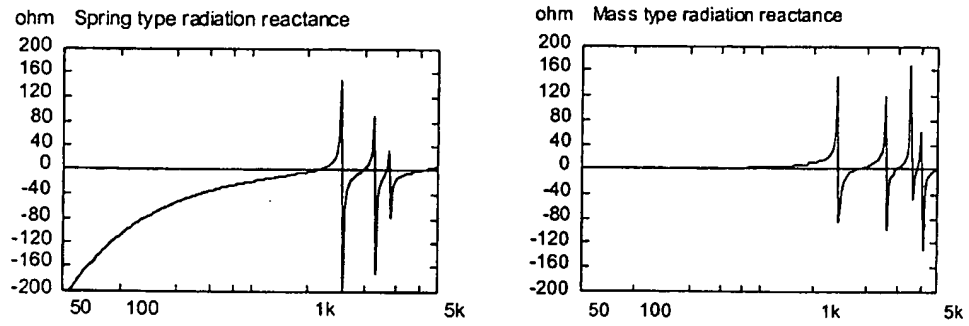


Fig. 15

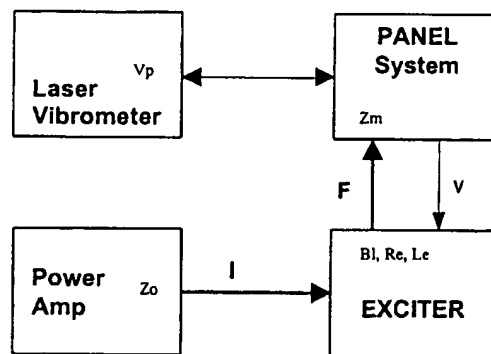


Fig. 16

7/22

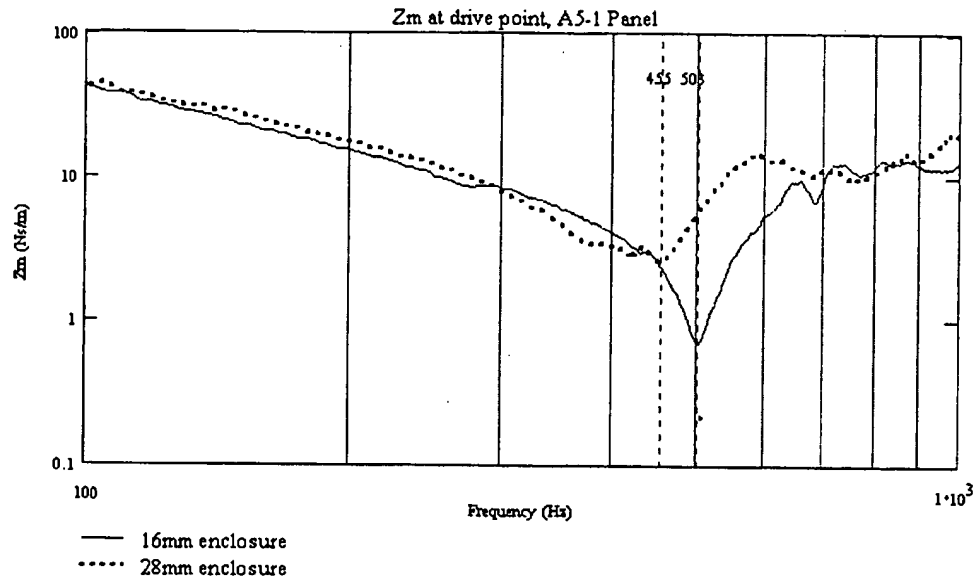


Fig. 18a A5-1 Panel

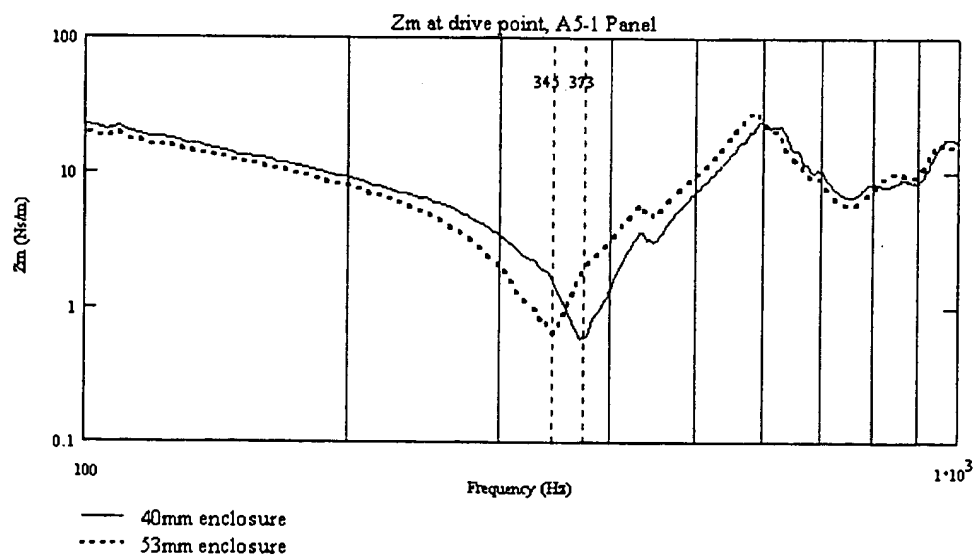


Fig. 18b A5-1 Panel

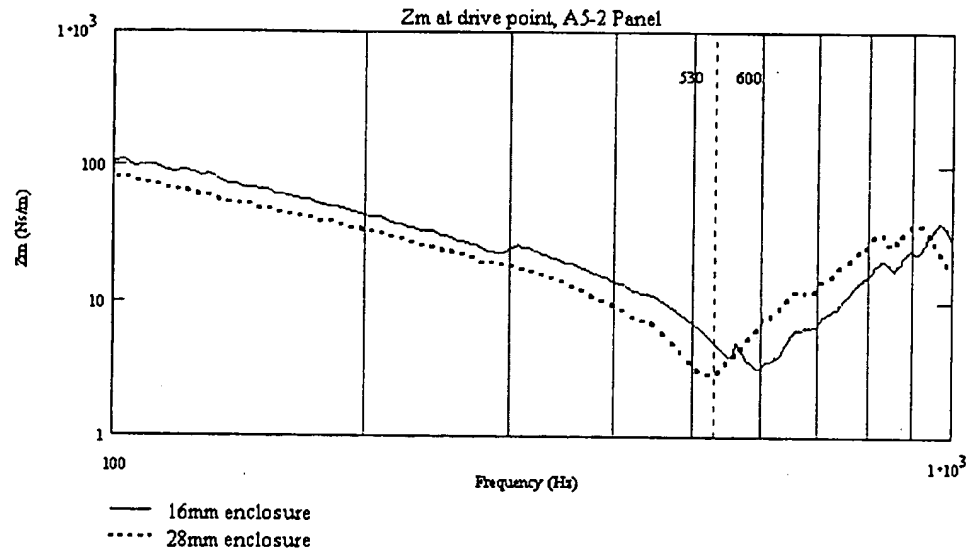


Fig. 18c A5-2 Panel

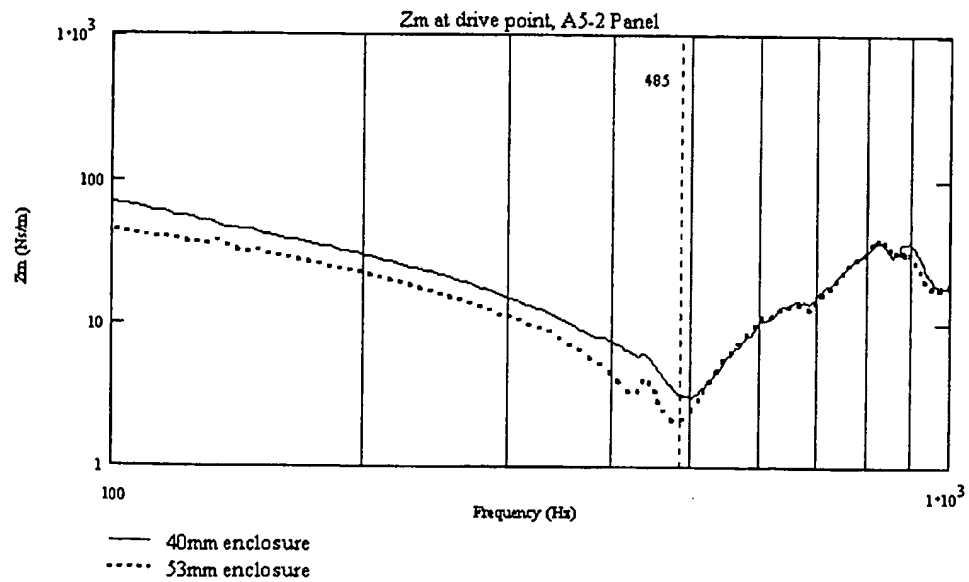


Fig. 18d A5-2 Panel

9/22

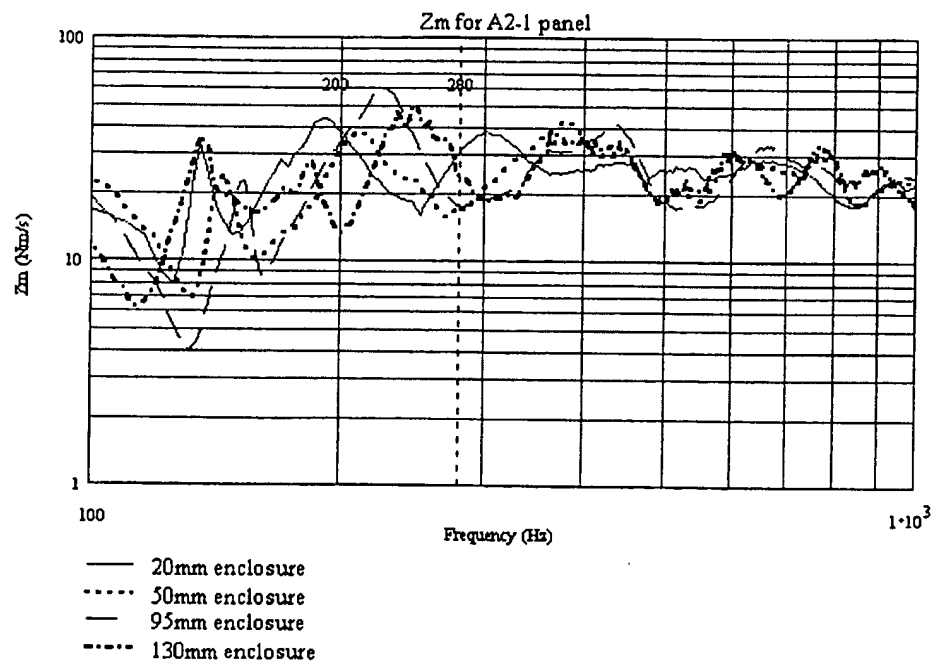


Fig. 18e. A2-1 Panel

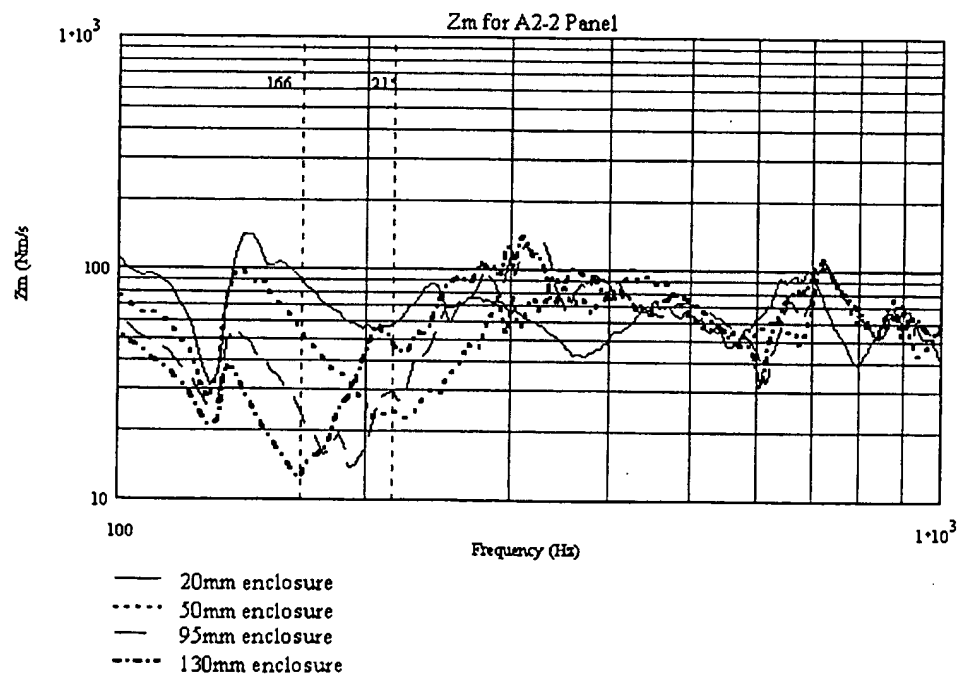


Fig. 18f A2-2 Panel

10/22

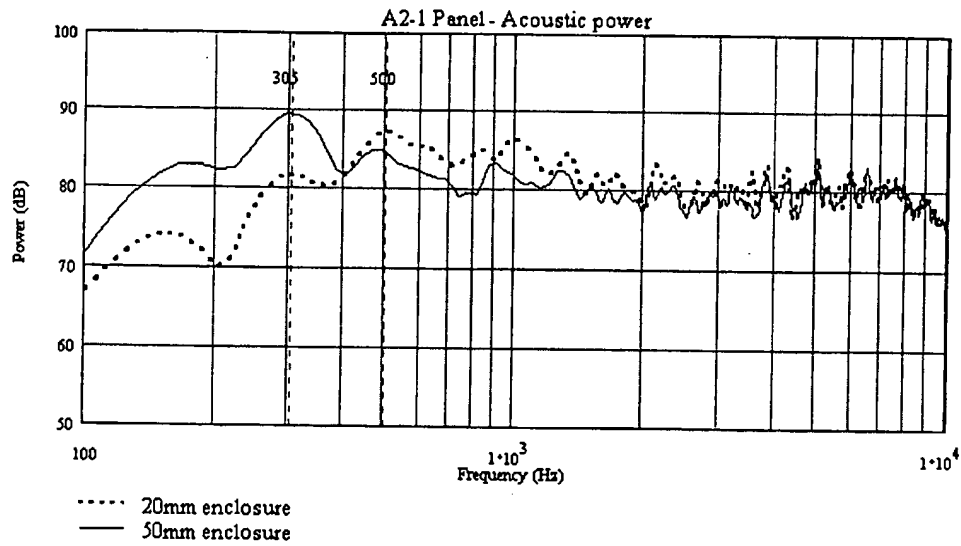


Fig. 19a A2-1 Panel

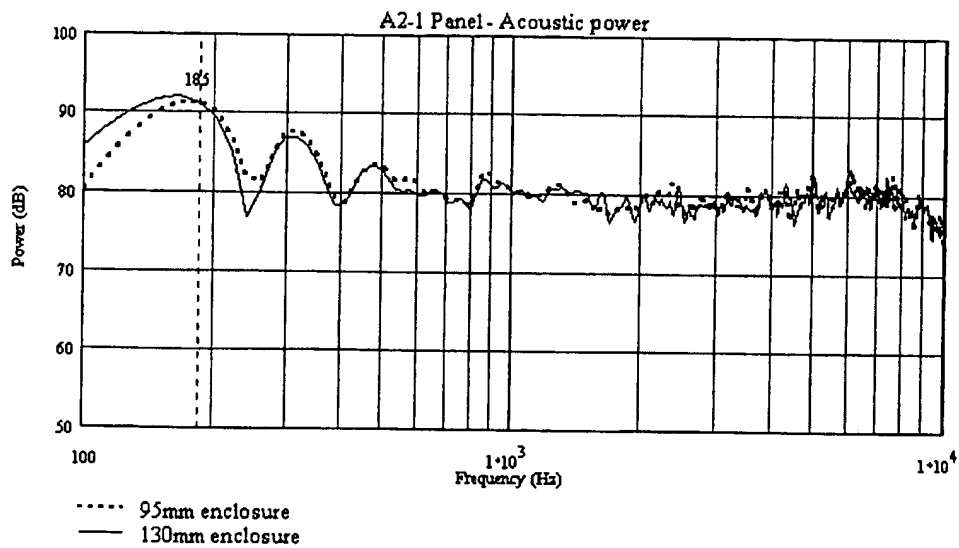


Fig. 19b A2-2 Panel

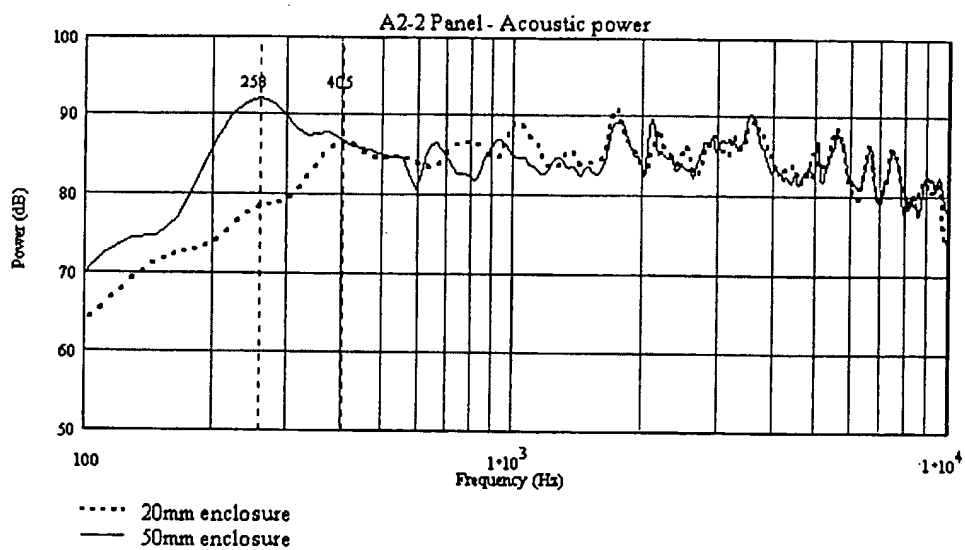


Fig. 19c A2-1 Panel

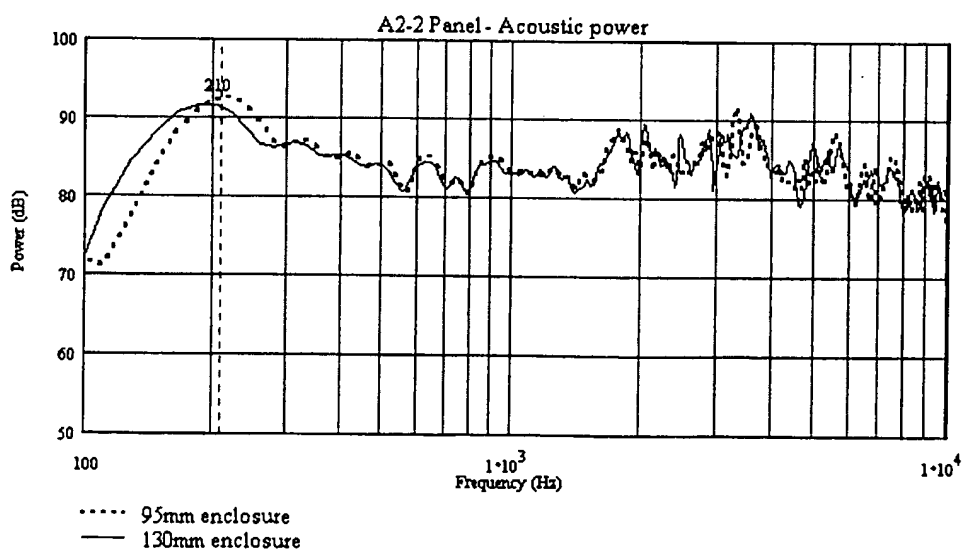


Fig. 19d A2-1 Panel

12/22

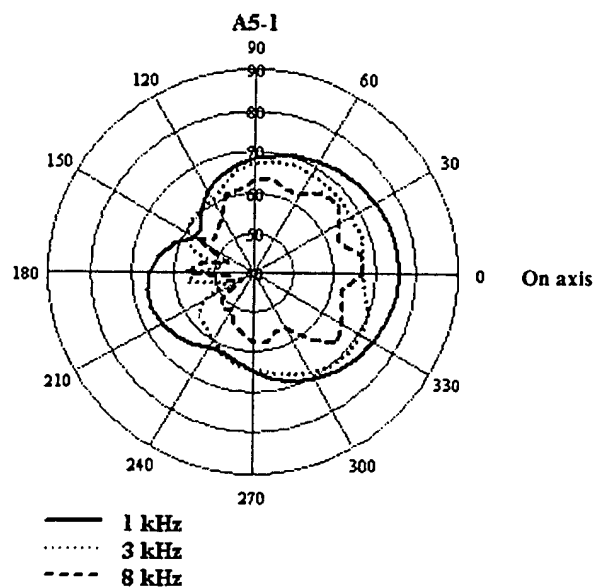


Fig. 20a A5-1 Panel

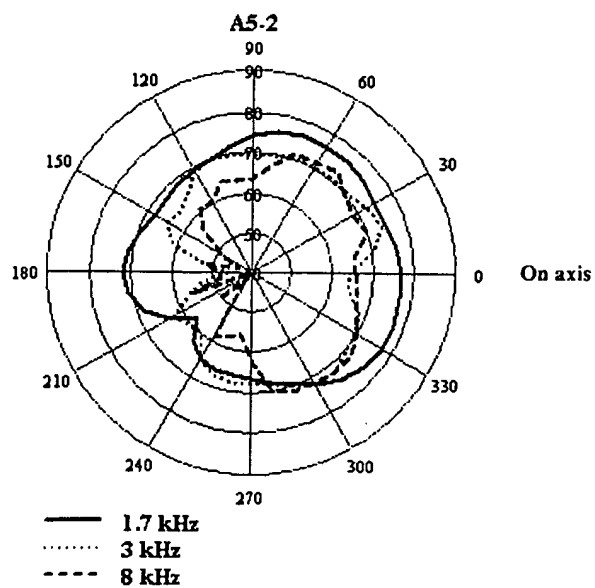


Fig. 20b A5-2 Panel

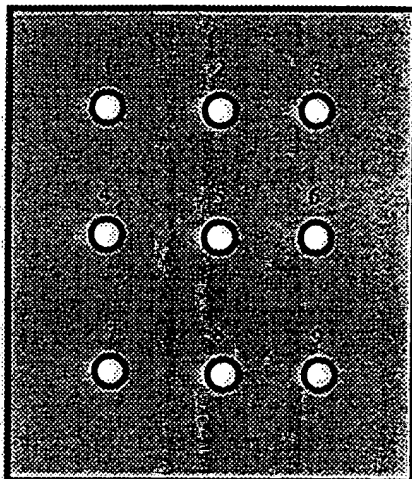


Fig. 21

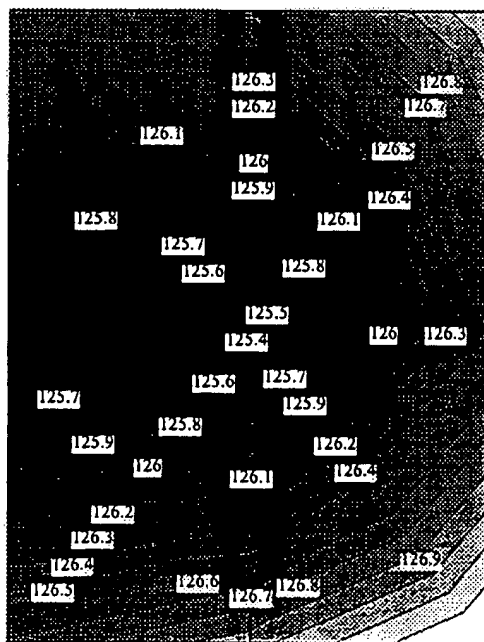


Fig. 22a A5-1 Panel 483Hz

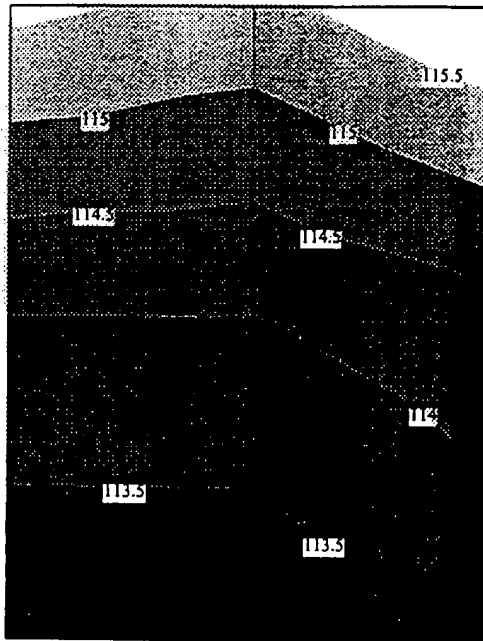


Fig. 22b A5-1 panel 301Hz

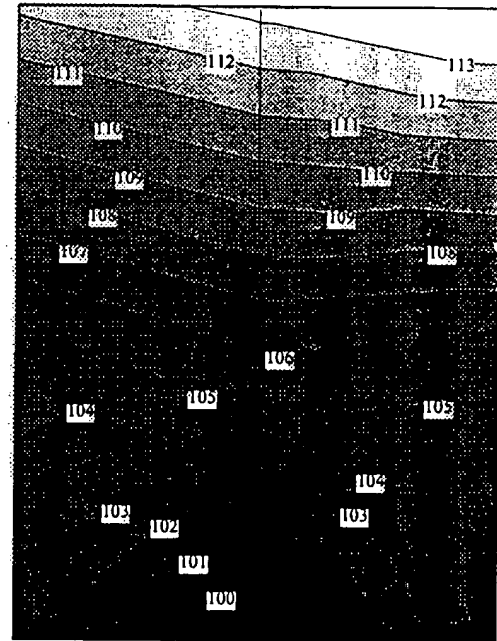


Fig.22c A5-1 panel 817Hz

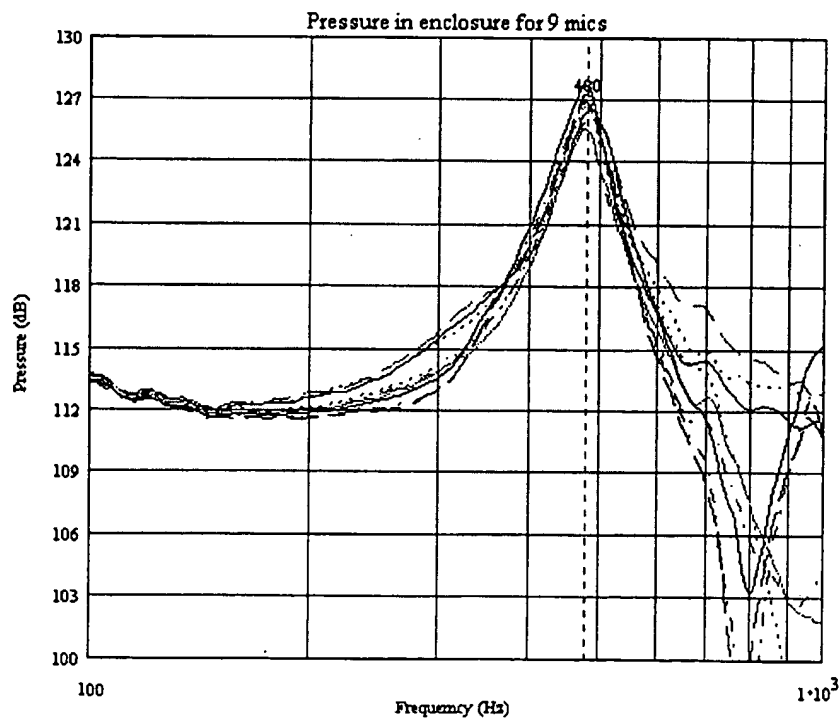


Fig. 23 A5-1 panel

A2-1 Panel velocity at 165 Hz.
50mm Enclosure

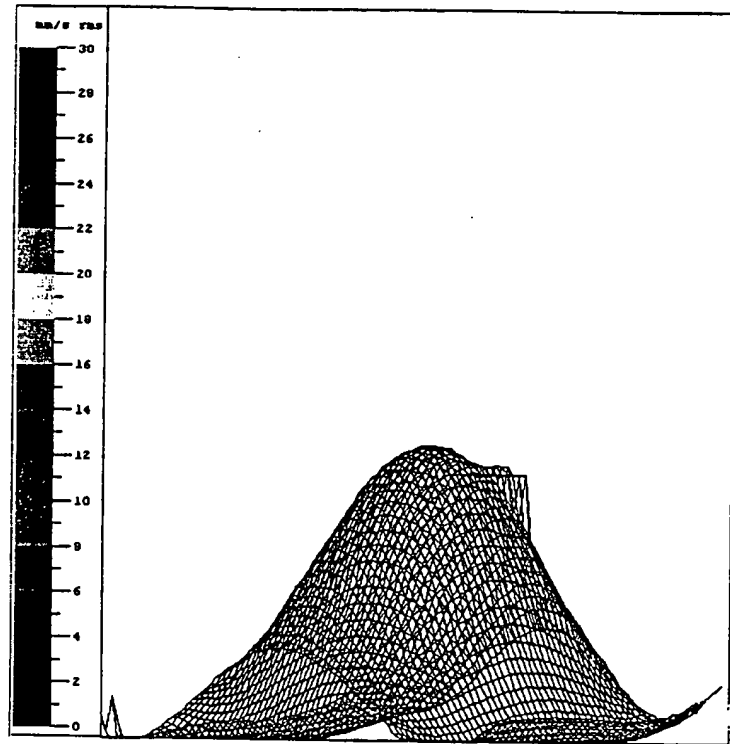
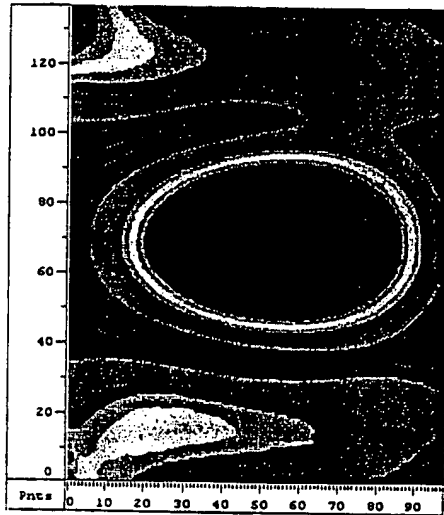


Fig. 24a

A2-1 Panel velocity at 153 Hz.
(95mm Enclosure)

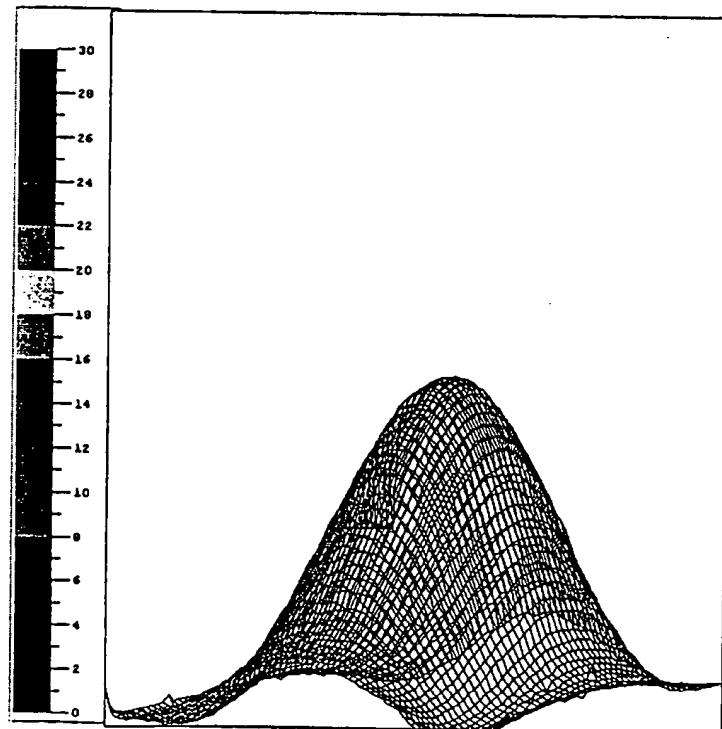
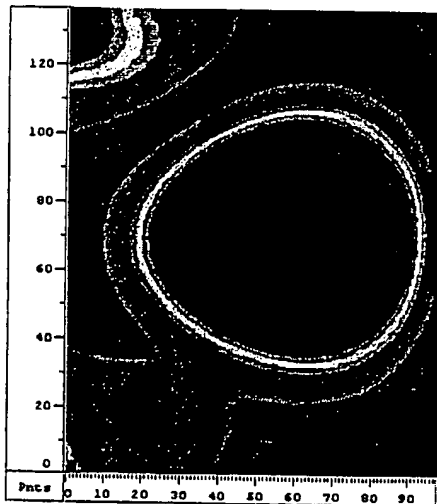


Fig. 24b

A2-2 Panel velocity at 194 Hz.
(95mm Enclosure)

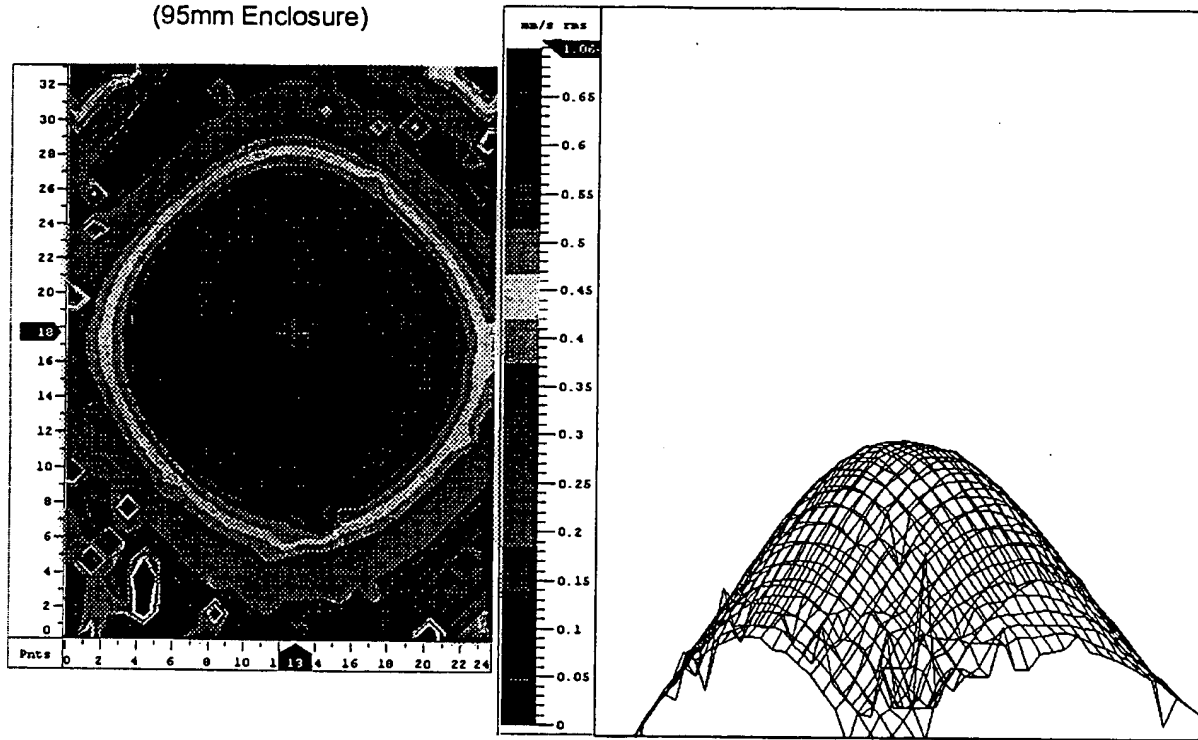


Fig. 24c

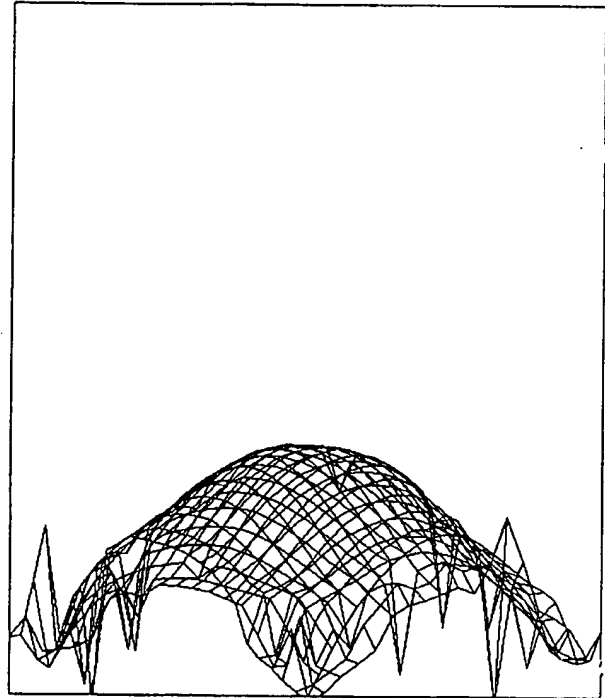


Fig. 24d

17/22

A2-2 Panel velocity at 194 Hz.
(95mm Enclosure)

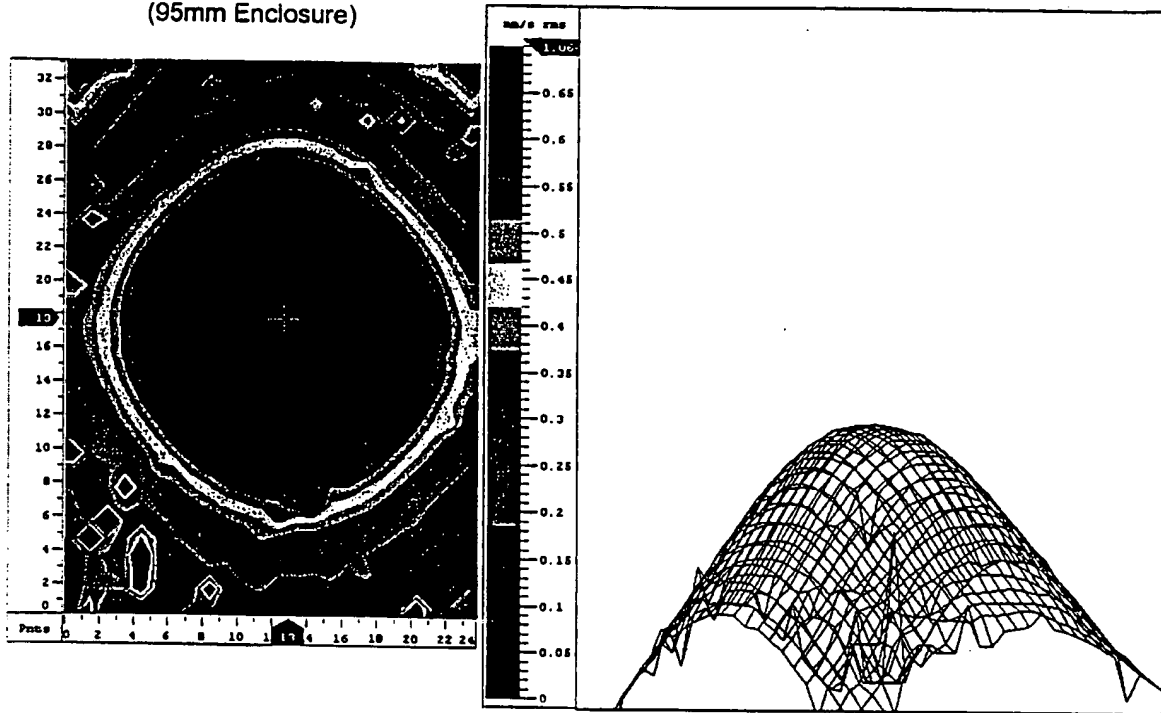


Fig. 24c

A2-2 Panel velocity at 166 Hz.
(130mm Enclosure)

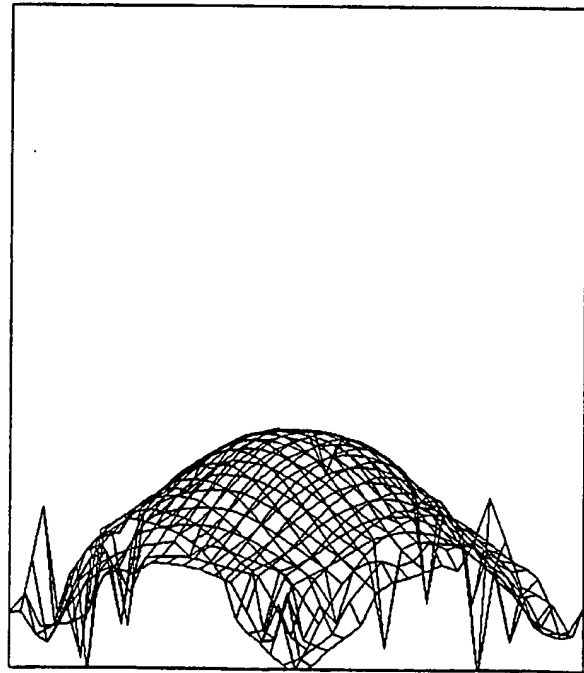


Fig. 24d

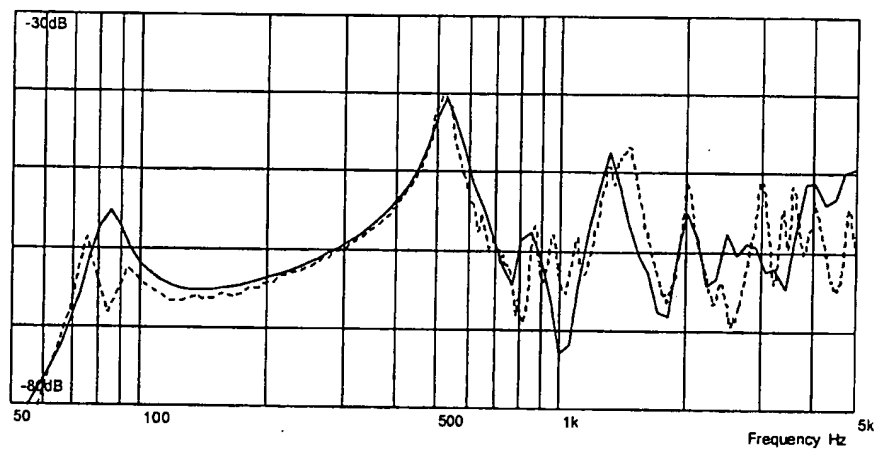


Fig. 25a

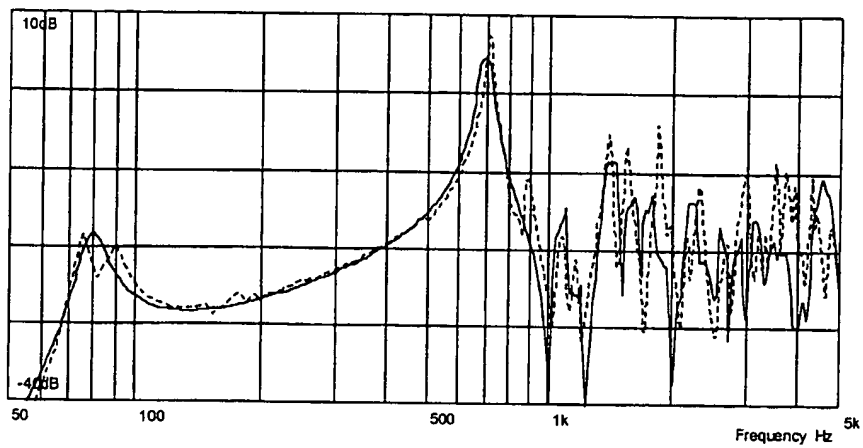


Fig. 25b

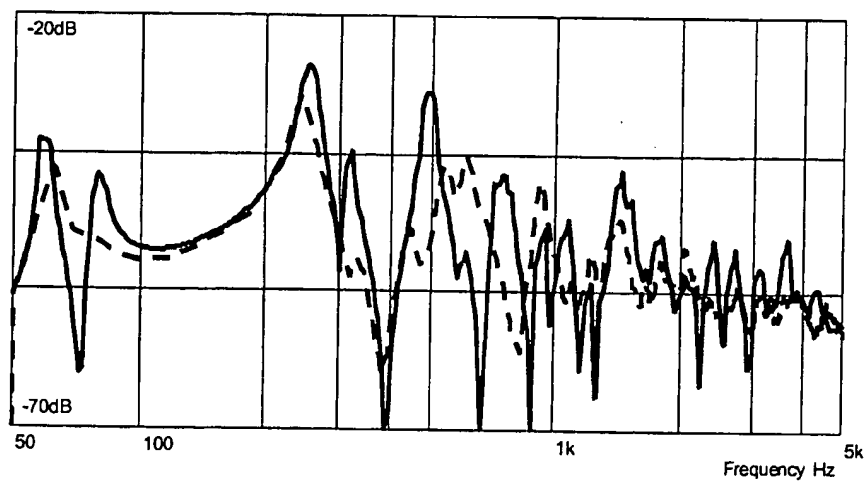


Fig. 26a free space

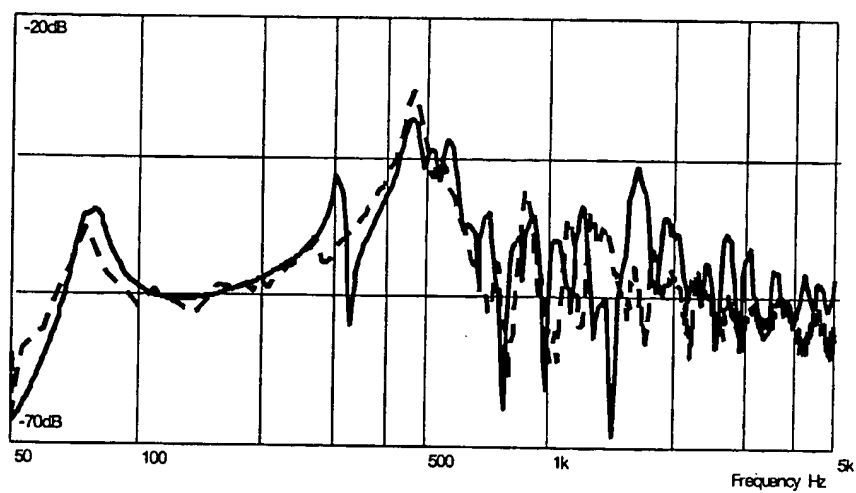


Fig. 26b Double enclosure

20/22

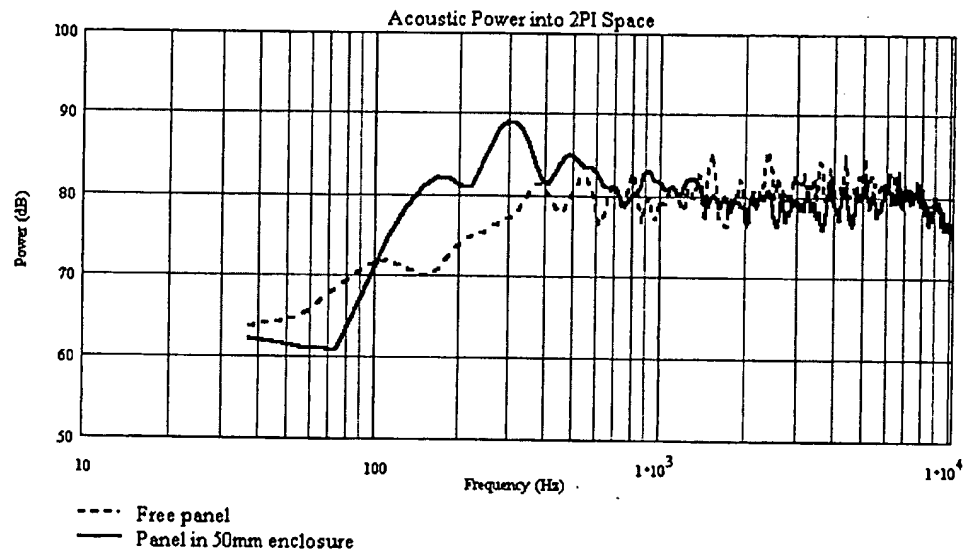


Figure 27a, A2-1 panel

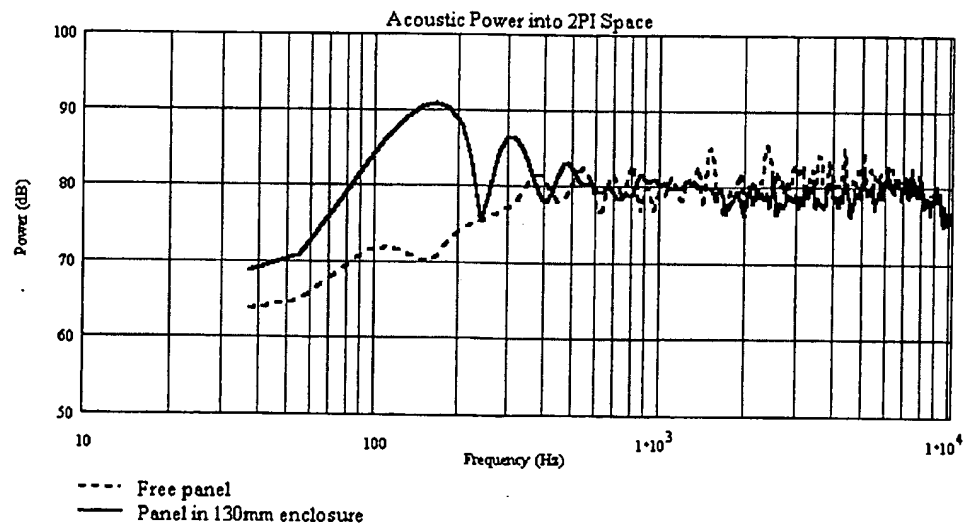


Fig. 27b A2-1 panel

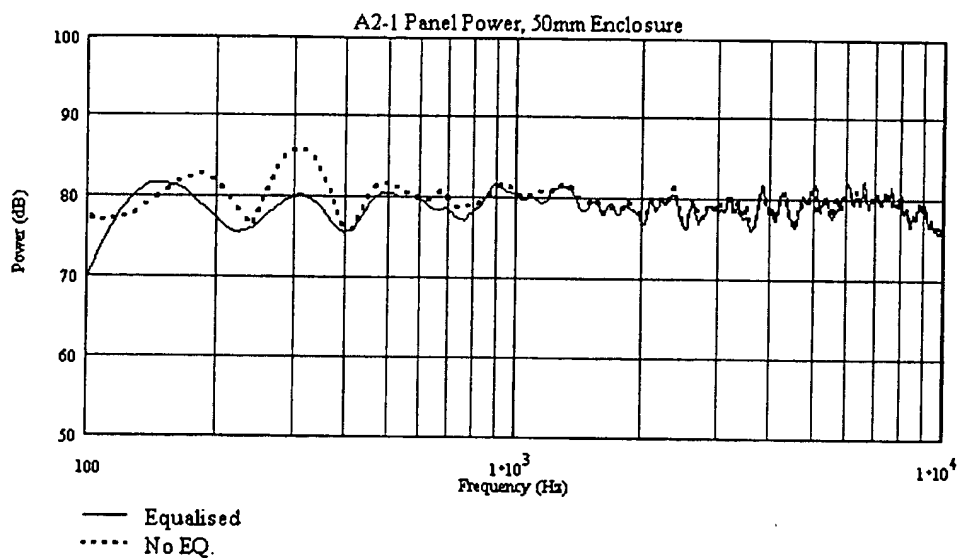


Fig. 28a

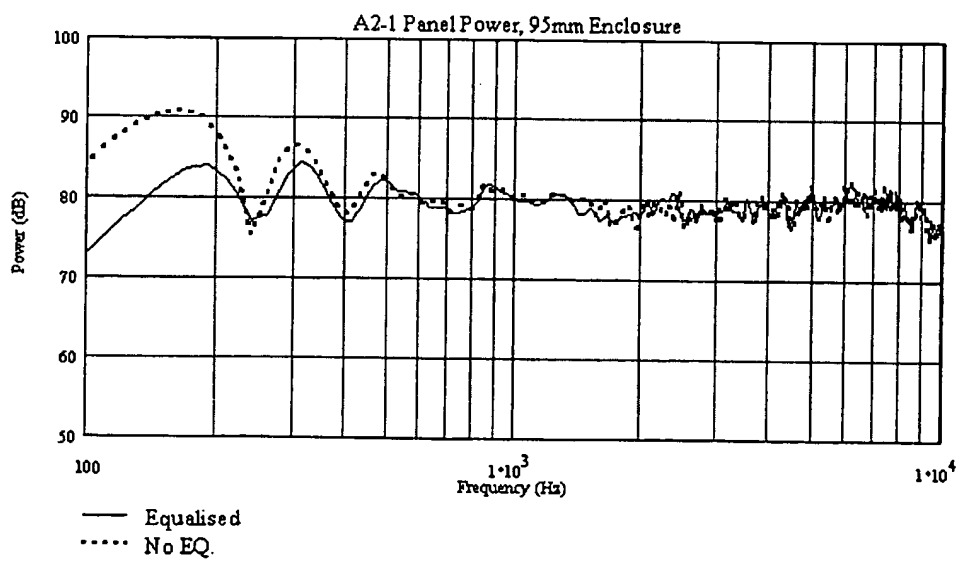


Fig. 28b

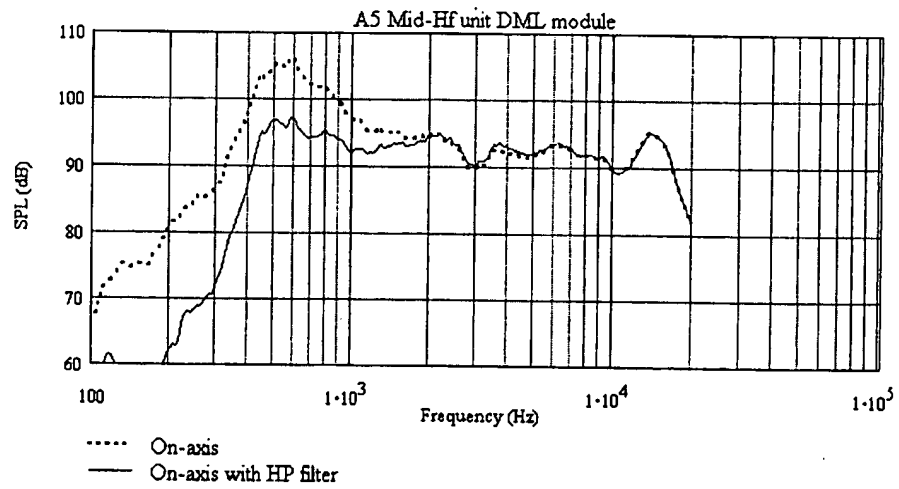


Fig. 28c.

INTERNATIONAL SEARCH REPORT

International Application No. **PCT/GB 99/01048**

A. CLASSIFICATION OF SUBJECT MATTER <p style="margin-left: 40px;">H 04 R 1/02</p> <p style="font-size: small;">According to International Patent Classification (IPC) or to both national classification and IPC: 6</p>		
B. FIELDS SEARCHED <p style="font-size: small;">Minimum documentation searched (classification system followed by classification symbols)</p> <p style="margin-left: 40px;">H 04 R</p> <p style="font-size: small;">Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p> <p style="font-size: small;">Electronic data base consulted during the international search (name of data base and, where practical, search terms used)</p>		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97/09861 A1 (VERITY GROUP) 13 March 1997, abstract, page 1, line 15 - page 4, line 5, fig. 3, claim 1. <p style="text-align: center;">--</p>	1, 11
A	WO 89/00798 A1 (AVM HESS) 26 January 1989 (26.01.89), abstract, page 1, line 1 - page 4, line 17, fig. 32, claims 1, 2. <p style="text-align: center;">--</p>	1, 11
A	WO 97/09859 A1 (VERITY GROUP) 13 March 1997. <p style="text-align: center;">----</p>	
<div style="display: flex; justify-content: space-between;"> <input type="checkbox"/> Further documents are listed in the continuation of box C. <input type="checkbox"/> Patent family members are listed in annex. </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p style="font-size: small;">* Special categories of cited documents:</p> <p style="font-size: x-small;">*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p style="font-size: x-small;">*B* earlier document but published on or after the international filing date</p> <p style="font-size: x-small;">*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p style="font-size: x-small;">*O* document referring to an oral disclosure, use, exhibition or other means</p> <p style="font-size: x-small;">*P* document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p style="font-size: x-small;">*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p style="font-size: x-small;">*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p style="font-size: x-small;">*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p style="font-size: x-small;">*&* document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <p style="text-align: center; font-size: large;">18 June 1999</p>		Date of mailing of the international search report <p style="text-align: center; font-size: large;">09. 08. 1999</p>
Name and mailing address of the ISA European Patent Office, P.O. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 631 epo nl, Fax (+ 31-70) 340-3016		Authorized officer <p style="text-align: center; font-size: large;">GRÖSSING e.h.</p>

ANHANG

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

ANNEX

to the International Search
Report to the International Patent
Application No.

ANNEXE

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/GB 99/01048 SAE 230542

In diesem Anhang sind die Mitglieder
der Patentfamilien der im obenge-
nannten internationalen Recherchenbericht
angeführten Patentdokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visé ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

Im Recherchenbericht angeführtes Patentdokument in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
WO A1	9709861	13-03-1997	
		AT E 176826	15-03-1999
		AT E 177281	15-03-1999
		AT E 177282	15-03-1999
		AT E 177574	15-03-1999
		AT E 177575	15-03-1999
		AT E 177576	15-03-1999
		AT E 177577	15-03-1999
		AT E 177578	15-03-1999
		AT E 177579	15-03-1999
		AT E 177580	15-03-1999
		AT E 177581	15-03-1999
		AT E 177582	15-03-1999
		AT E 177583	15-03-1999
		AT E 179043	15-04-1999
		AT E 179044	15-04-1999
		AT E 179045	15-04-1999
		AT E 179296	15-05-1999
		AT E 179397	15-05-1999
		AT E 179563	15-05-1999
		AT E 179564	15-05-1999
		AU A1 68801/96	27-03-1997
		AU A1 68802/96	27-03-1997
		AU A1 68803/96	27-03-1997
		AU A1 68804/96	27-03-1997
		AU A1 68805/96	27-03-1997
		AU A1 68806/96	27-03-1997
		AU A1 68807/96	27-03-1997
		AU A1 68808/96	27-03-1997
		AU A1 68809/96	27-03-1997
		AU A1 68810/96	27-03-1997
		AU A1 68812/96	27-03-1997
		AU A1 68813/96	27-03-1997
		AU A1 68814/96	27-03-1997
		AU A1 68815/96	27-03-1997
		AU A1 68816/96	27-03-1997
		AU A1 68818/96	27-03-1997
		AU A1 68819/96	27-03-1997
		AU A1 68820/96	27-03-1997
		AU A1 68821/96	27-03-1997
		AU A1 68822/96	27-03-1997
		AU A1 68823/96	27-03-1997
		AU B2 699890	17-12-1998
		AU B2 702863	11-03-1999
		AU B2 702865	11-03-1999
		AU B2 702867	11-03-1999
		AU B2 702873	11-03-1999
		AU B2 702920	11-03-1999
		AU B2 702969	11-03-1999
		AU B2 703000	11-03-1999
		AU B2 703004	11-03-1999
		AU B2 703015	11-03-1999
		AU B2 703020	11-03-1999
		AU B2 703058	11-03-1999
		AU B2 703061	11-03-1999
		AU B2 703065	11-03-1999
		AU B2 703071	11-03-1999
		AU B2 703122	18-03-1999
		AU B2 703198	18-03-1999
		AU B2 703296	25-03-1999
		AU B2 704237	15-04-1999
		AU B2 704299	22-04-1999
		AU B2 705592	27-05-1999
		CA AA 2230053	13-03-1997
		CA AA 2230064	13-03-1997
		CA AA 2230075	13-03-1997

[illegible]

2230104
2230154
2230155
2230161
2230234
2230438
2230444
2230449
2230461
2230701
2230702
2230704
1194085
1194085
1195454
1195455
1195456
1195458
1195459
1195460
1195461
1195462
1195463
9800572
9800573
9800574
9800575
9800577
9800578
9800579
9800580
9800581
9800582
9800583
9800584
9800585
9800586
9800587
9800588
9800589
9800590
9800591
9800592
9800593
9800594
9800595
9800596
9800597
9800598
9800599
9800600
9800601
9800602
9800603
9800604
9800605
9800606
9800607
9800608
9800609
9800610
9800611
9800612
9800613
9800614
9800615
9800616
9800617
9800618
9800619
9800620
9800621
9800622
9800623
9800624
9800625
9800626
9800627
9800628
9800629
9800630
9800631
9800632
9800633
9800634
9800635
9800636
9800637
9800638
9800639
9800640
9800641
9800642
9800643
9800644
9800645
9800646
9800647
9800648
9800649
9800650
9800651
9800652
9800653
9800654
9800655
9800656
9800657
9800658
9800659
9800660
9800661
9800662
9800663
9800664
9800665
9800666
9800667
9800668
9800669
9800670
9800671
9800672
9800673
9800674
9800675
9800676
9800677
9800678
9800679
9800680
9800681
9800682
9800683
9800684
9800685
9800686
9800687
9800688
9800689
9800690
9800691
9800692
9800693
9800694
9800695
9800696
9800697
9800698
9800699
9800700
9800701
9800702
9800703
9800704
9800705
9800706
9800707
9800708
9800709
9800710
9800711
9800712
9800713
9800714
9800715
9800716
9800717
9800718
9800719
9800720
9800721
9800722
9800723
9800724
9800725
9800726
9800727
9800728
9800729
9800730
9800731
9800732
9800733
9800734
9800735
9800736
9800737
9800738
9800739
9800740
9800741
9800742
9800743
9800744
9800745
9800746
9800747
9800748
9800749
9800750
9800751
9800752
9800753
9800754
9800755
9800756
9800757
9800758
9800759
9800760
9800761
9800762
9800763
9800764
9800765
9800766
9800767
9800768
9800769
9800770
9800771
9800772
9800773
9800774
9800775
9800776
9800777
9800778
9800779
9800780
9800781
9800782
9800783
9800784
9800785
9800786
9800787
9800788
9800789
9800790
9800791
9800792
9800793
9800794
9800795
9800796
9800797
9800798
9800799
9800800
9800801
9800802
9800803
9800804
9800805
9800806
9800807
9800808
9800809
9800810
9800811
9800812
9800813
9800814
9800815
9800816
9800817
9800818
9800819
9800820
9800821
9800822
9800823
9800824
9800825
9800826
9800827
9800828
9800829
9800830
9800831
9800832
9800833
9800834
9800835
9800836
9800837
9800838
9800839
9800840
9800841
9800842
9800843
9800844
9800845
9800846
9800847
9800848
9800849
9800850
9800851
9800852
9800853
9800854
9800855
9800856
9800857
9800858
9800859
9800860
9800861
9800862
9800863
9800864
9800865
9800866
9800867
9800868
9800869
9800870
9800871
9800872
9800873
9800874
9800875
9800876
9800877
9800878
9800879
9800880
9800881
9800882
9800883
9800884
9800885
9800886
9800887
9800888
9800889
9800890
9800891
9800892
9800893
9800894
9800895
9800896
9800897
9800898
9800899
9800900
9800901
9800902
9800903
9800904
9800905
9800906
9800907
9800908
9800909
9800910
9800911
9800912
9800913
9800914
9800915
9800916
9800917
9800918
9800919
9800920
9800921
9800922
9800923
9800924
9800925
9800926
9800927
9800928
9800929
9800930
9800931
9800932
9800933
9800934
9800935
9800936
9800937
9800938
9800939
9800940
9800941
9800942
9800943
9800944
9800945
9800946
9800947
9800948
9800949
9800950
9800951
9800952
9800953
9800954
9800955
9800956
9800957
9800958
9800959
9800960
9800961
9800962
9800963
9800964
9800965
9800966
9800967
9800968
9800969
9800970
9800971
9800972
9800973
9800974
9800975
9800976
9800977
9800978
9800979
9800980
9800981
9800982
9800983
9800984
9800985
9800986
9800987
9800988
9800989
9800990
9800991
9800992
9800993
9800994
9800995
9800996
9800997
9800998
9800999
9801000
9801001
9801002
9801003
9801004

[illegible]

FF	F1	8477663	10-03-1	9999
FF	F1	8477665	10-03-1	9999
FF	F1	8477670	10-03-1	9999
FF	F1	8477671	10-03-1	9999
FF	F1	8477672	10-03-1	9999
FF	F1	8477673	10-03-1	9999
FF	F1	8477675	10-03-1	9999
FF	F1	8477668	14-04-1	9999
FF	F1	8477676	14-04-1	9999
FF	F1	8477677	14-04-1	9999
FF	F1	8477665	21-04-1	9999
FF	F1	8477678	21-04-1	9999
FF	F1	8477664	28-04-1	9999
GB	AO	8477674	28-04-1	9999
HU	AB	96068336	05-06-1	9999
HU	AB	98020667	28-12-1	9999
HU	AB	98023389	01-02-1	9999
HU	AB	99000168	28-04-1	9999
HU	AB	99000177	28-04-1	9999
HU	AB	99000179	28-04-1	9999
IL	AO	1233371	24-09-1	9999
IL	AO	1233374	24-09-1	9999
IL	AO	1233375	24-09-1	9999
IL	AO	1233438	24-09-1	9999
IL	AO	1233480	24-09-1	9999
IL	AO	1233481	24-09-1	9999
IL	AO	1233482	24-09-1	9999
IL	AO	1233483	24-09-1	9999
IL	AO	1233484	24-09-1	9999
IL	AO	1233485	24-09-1	9999
IL	AO	1233486	24-09-1	9999
IL	AO	1233487	24-09-1	9999
IL	AO	1233488	24-09-1	9999
IL	AO	1233489	24-09-1	9999
NZ	A	3165545	27-05-1	9999
NZ	A	3165546	27-05-1	9999
NZ	A	3165549	27-05-1	9999
NZ	A	3165551	27-05-1	9999
NZ	A	3165552	27-05-1	9999
NZ	A	3165555	27-05-1	9999
NZ	A	3165566	27-05-1	9999
NZ	A	3165562	27-05-1	9999
NZ	A	3165563	27-05-1	9999
NZ	A	3165543	28-10-1	9999
NZ	A	3165550	28-10-1	9999
NZ	A	3165558	28-10-1	9999
NZ	A	3165551	28-11-1	9999
PL	A1	3225211	06-07-1	9999
PL	A1	3225215	06-07-1	9999
PL	A1	3225236	06-07-1	9999
PL	A1	3225237	06-07-1	9999
PL	A1	3225239	06-07-1	9999
PL	A1	3225244	06-07-1	9999
PL	A1	3225245	06-07-1	9999
PL	A1	3225246	06-07-1	9999
PL	A1	3225248	06-07-1	9999
PL	A1	3225272	20-07-1	9999
PL	A1	3225273	20-07-1	9999
PL	A1	3225274	20-07-1	9999
PL	A1	3225284	20-07-1	9999
PL	A1	3225285	20-07-1	9999
SK	A3	22553/98	09-09-1	9999
SK	A3	2256/98	09-09-1	9999
SK	A3	2257/98	09-09-1	9999
SK	A3	2258/98	09-09-1	9999
SK	A3	2259/98	09-09-1	9999
SK	A3	2260/98	09-09-1	9999
SK	A3	2261/98	09-09-1	9999
SK	A3	2262/98	09-09-1	9999
SK	A3	2263/98	09-09-1	9999
SK	A3	2264/98	09-09-1	9999
SK	A3	2265/98	09-09-1	9999
SK	A3	2266/98	09-09-1	9999
SK	A3	2264/98	07-10-1	9999
SK	A3	2255/98	07-10-1	9999
WO	A1	97098698	13-03-1	9997
WO	A1	9709843	13-03-1	9997
WO	A1	9709844	13-03-1	9997
WO	A1	9709846	13-03-1	9997
WO	A1	9709847	13-03-1	9997
WO	A1	9709848	13-03-1	9997
WO	A1	9709849	13-03-1	99

		WO	A2	9709854	13-03-1997
		WO	A2	9709855	13-03-1997
		WO	A2	9709856	13-03-1997
		WO	A2	9709857	13-03-1997
		WO	A2	9709840	03-04-1997
		WO	A2	9709853	03-04-1997
		WO	A2	9709841	01-05-1997
		WO	A2	9709852	01-05-1997
		WO	A2	9709854	01-05-1997
		WO	A2	9709856	01-05-1997
		WO	A2	9709845	29-05-1997
		WO	A2	9709842	10-07-1997
		GB	AO	9522281	03-01-1996
		GB	AO	9517918	01-11-1995
3900798	26-01-1989	US	A	4914750	03-04-1990
7709859	13-03-1997	AT	E	176826	15-03-1999
		AT	E	177281	15-03-1999
		AT	E	177282	15-03-1999
		AT	E	177574	15-03-1999
		AT	E	177575	15-03-1999
		AT	E	177576	15-03-1999
		AT	E	177577	15-03-1999
		AT	E	177578	15-03-1999
		AT	E	177579	15-03-1999
		AT	E	177580	15-03-1999
		AT	E	177581	15-03-1999
		AT	E	177582	15-03-1999
		AT	E	177583	15-03-1999
		AT	E	179043	15-04-1999
		AT	E	179044	15-04-1999
		AT	E	179045	15-04-1999
		AT	E	179296	15-05-1999
		AT	E	179297	15-05-1999
		AT	E	179563	15-05-1999
		AT	E	179564	15-05-1999
		AU	A1	68801/96	27-06-1997
		AU	A1	68802/96	27-06-1997
		AU	A1	68803/96	27-06-1997
		AU	A1	68804/96	27-06-1997
		AU	A1	68805/96	27-06-1997
		AU	A1	68806/96	27-06-1997
		AU	A1	68807/96	27-06-1997
		AU	A1	68808/96	27-06-1997
		AU	A1	68809/96	27-06-1997
		AU	A1	68810/96	27-06-1997
		AU	A1	68812/96	27-06-1997
		AU	A1	68813/96	27-06-1997
		AU	A1	68814/96	27-06-1997
		AU	A1	68815/96	27-06-1997
		AU	A1	68816/96	27-06-1997
		AU	A1	68818/96	27-06-1997
		AU	A1	68819/96	27-06-1997
		AU	A1	68820/96	27-06-1997
		AU	A1	68821/96	27-06-1997
		AU	A1	68822/96	27-06-1997
		AU	A1	68823/96	27-06-1997
		AU	B2	699890	17-12-1998
		AU	B2	702863	11-03-1999
		AU	B2	702865	11-03-1999
		AU	B2	702867	11-03-1999
		AU	B2	702873	11-03-1999
		AU	B2	702920	11-03-1999
		AU	B2	702999	11-03-1999
		AU	B2	703000	11-03-1999
		AU	B2	703004	11-03-1999
		AU	B2	703015	11-03-1999
		AU	B2	703020	11-03-1999
		AU	B2	703058	11-03-1999
		AU	B2	703061	11-03-1999
		AU	B2	703065	11-03-1999
		AU	B2	703071	11-03-1999
		AU	B2	703122	18-03-1999
		AU	B2	703198	18-03-1999
		AU	B2	703296	25-06-1999
		AU	B2	704227	15-04-1999
		AU	B2	704299	22-04-1999
		AU	B2	705592	27-05-1999
		CA	AA	2230053	13-04-1997
		CA	AA	2230064	13-04-1997
		CA	AA	2230075	13-04-1997
		CA	AA	2230104	13-04-1997
		CA	AA	2230154	13-04-1997
		CA	AA	2230155	13-04-1997
		CA	AA	2230161	13-04-1997
		CA	AA	2230234	13-04-1997
		CA	AA	2230438	13-04-1997
		CA	AA	2230444	13-04-1997
		CA	AA	2230449	13-04-1997
		CA	AA	2230461	13-04-1997

CA	AA	2230701	13-03-1997
CA	AA	2230702	13-03-1997
CA	AA	2230704	13-03-1997
CA	AA	1194085	23-09-1998
CA	AA	1194086	23-09-1998
CA	AA	1195454	07-10-1998
CA	AA	1195455	07-10-1998
CA	AA	1195456	07-10-1998
CA	AA	1195457	07-10-1998
CA	AA	1195458	07-10-1998
CA	AA	1195459	07-10-1998
CA	AA	1195460	07-10-1998
CA	AA	1195461	07-10-1998
CA	AA	1195462	07-10-1998
CA	AA	1195463	07-10-1998
CA	AA	9800572	15-07-1998
CA	AA	9800573	15-07-1998
CA	AA	9800574	15-07-1998
CA	AA	9800575	15-07-1998
CA	AA	9800577	15-07-1998
CA	AA	9800578	15-07-1998
CA	AA	9800579	15-07-1998
CA	AA	9800580	15-07-1998
CA	AA	9800581	15-07-1998
CA	AA	9800582	15-07-1998
CA	AA	9800583	15-07-1998
CA	AA	9800584	15-07-1998
CA	AA	9800585	15-07-1998
CA	AA	9800576	11-11-1998
CA	AA	69601554	25-03-1999
CA	AA	69601647	08-04-1999
CA	AA	69601648	08-04-1999
CA	AA	69601723	15-04-1999
CA	AA	69601724	15-04-1999
CA	AA	69601725	15-04-1999
CA	AA	69601726	15-04-1999
CA	AA	69601728	15-04-1999
CA	AA	69601729	15-04-1999
CA	AA	69601731	15-04-1999
CA	AA	69601732	15-04-1999
CA	AA	69601733	15-04-1999
CA	AA	69601734	15-04-1999
CA	AA	69602100	20-05-1999
CA	AA	69602101	20-05-1999
CA	AA	69602102	20-05-1999
CA	AA	69602203	27-05-1999
CA	AA	69602204	27-05-1999
CA	AA	69602279	02-06-1999
CA	AA	69602281	02-06-1999
CA	AA	847667	17-06-1999
CA	AA	847669	17-06-1999
CA	AA	847662	17-06-1999
CA	AA	847663	17-06-1999
CA	AA	847665	17-06-1999
CA	AA	847666	17-06-1999
CA	AA	847667	17-06-1999
CA	AA	847668	17-06-1999
CA	AA	847670	17-06-1999
CA	AA	847673	17-06-1999
CA	AA	847676	17-06-1999
CA	AA	847677	17-06-1999
CA	AA	847678	17-06-1999
CA	AA	847660	17-06-1999
CA	AA	847661	17-06-1999
CA	AA	847664	17-06-1999
CA	AA	847669	17-06-1999
CA	AA	847671	17-06-1999
CA	AA	847672	17-06-1999
CA	AA	847673	17-06-1999
CA	AA	847674	17-06-1999
CA	AA	847667	17-06-1999
CA	AA	847666	03-03-1999
CA	AA	847667	03-03-1999
CA	AA	847669	10-03-1999
CA	AA	847660	10-03-1999
CA	AA	847662	10-03-1999
CA	AA	847663	10-03-1999
CA	AA	847669	10-03-1999
CA	AA	847670	10-03-1999
CA	AA	847671	10-03-1999
CA	AA	847672	10-03-1999
CA	AA	847673	10-03-1999
CA	AA	847675	10-03-1999
CA	AA	847668	14-04-1999
CA	AA	847676	14-04-1999
CA	AA	847677	14-04-1999
CA	AA	847665	21-04-1999
CA	AA	847678	21-04-1999
CA	AA	847664	28-04-1999

EP	B1	847674	25	-04	-1	9999
GB	AO	96066836	05	-06	-1	9999
GB	AB	9802067	28	-12	-1	9999
HU	AB	9802389	01	-02	-1	9999
HU	AB	9900168	28	-04	-1	9999
HU	AB	9900177	28	-04	-1	9999
HU	AB	9900179	28	-04	-1	9999
HU	AO	1233371	24	-09	-1	9999
IL	AO	1233374	24	-09	-1	9999
IL	AO	1233375	24	-09	-1	9999
IL	AO	1233438	24	-09	-1	9999
IL	AO	1233480	24	-09	-1	9999
IL	AO	1233481	24	-09	-1	9999
IL	AO	1233482	24	-09	-1	9999
IL	AO	1233483	24	-09	-1	9999
IL	AO	1233484	24	-09	-1	9999
IL	AO	1233485	24	-09	-1	9999
IL	AO	1233486	24	-09	-1	9999
IL	AO	1233487	24	-09	-1	9999
IL	AO	1233488	24	-09	-1	9999
IL	AO	1233489	24	-09	-1	9999
NZ	A	165545	27	-05	-1	9999
NZ	A	165546	27	-05	-1	9999
NZ	A	165549	27	-05	-1	9999
NZ	A	165551	27	-05	-1	9999
NZ	A	165552	27	-05	-1	9999
NZ	A	165555	27	-05	-1	9999
NZ	A	165556	27	-05	-1	9999
NZ	A	165562	27	-05	-1	9999
NZ	A	165563	27	-05	-1	9999
NZ	A	165564	28	-10	-1	9999
NZ	A	165565	28	-10	-1	9999
NZ	A	165566	28	-10	-1	9999
NZ	A	165567	28	-10	-1	9999
NZ	A	165568	28	-10	-1	9999
NZ	A	165569	28	-10	-1	9999
NZ	A	165570	28	-10	-1	9999
NZ	A	165571	28	-10	-1	9999
NZ	A	165572	28	-10	-1	9999
NZ	A	165573	28	-10	-1	9999
NZ	A	165574	28	-10	-1	9999
NZ	A	165575	28	-10	-1	9999
NZ	A	165576	28	-10	-1	9999
NZ	A	165577	28	-10	-1	9999
NZ	A	165578	28	-10	-1	9999
NZ	A	165579	28	-10	-1	9999
NZ	A	165580	28	-10	-1	9999
NZ	A	165581	28	-10	-1	9999
NZ	A	165582	28	-10	-1	9999
NZ	A	165583	28	-10	-1	9999
NZ	A	165584	28	-10	-1	9999
NZ	A	165585	28	-10	-1	9999
NZ	A	165586	28	-10	-1	9999
NZ	A	165587	28	-10	-1	9999
NZ	A	165588	28	-10	-1	9999
NZ	A	165589	28	-10	-1	9999
NZ	A	165590	28	-10	-1	9999
NZ	A	165591	28	-10	-1	9999
NZ	A	165592	28	-10	-1	9999
NZ	A	165593	28	-10	-1	9999
NZ	A	165594	28	-10	-1	9999
NZ	A	165595	28	-10	-1	9999
NZ	A	165596	28	-10	-1	9999
NZ	A	165597	28	-10	-1	9999
NZ	A	165598	28	-10	-1	9999
NZ	A	165599	28	-10	-1	9999
NZ	A	165600	28	-10	-1	9999
NZ	A	165601	28	-10	-1	9999
NZ	A	165602	28	-10	-1	9999
NZ	A	165603	28	-10	-1	9999
NZ	A	165604	28	-10	-1	9999
NZ	A	165605	28	-10	-1	9999
NZ	A	1				